Original Drawing Size A1

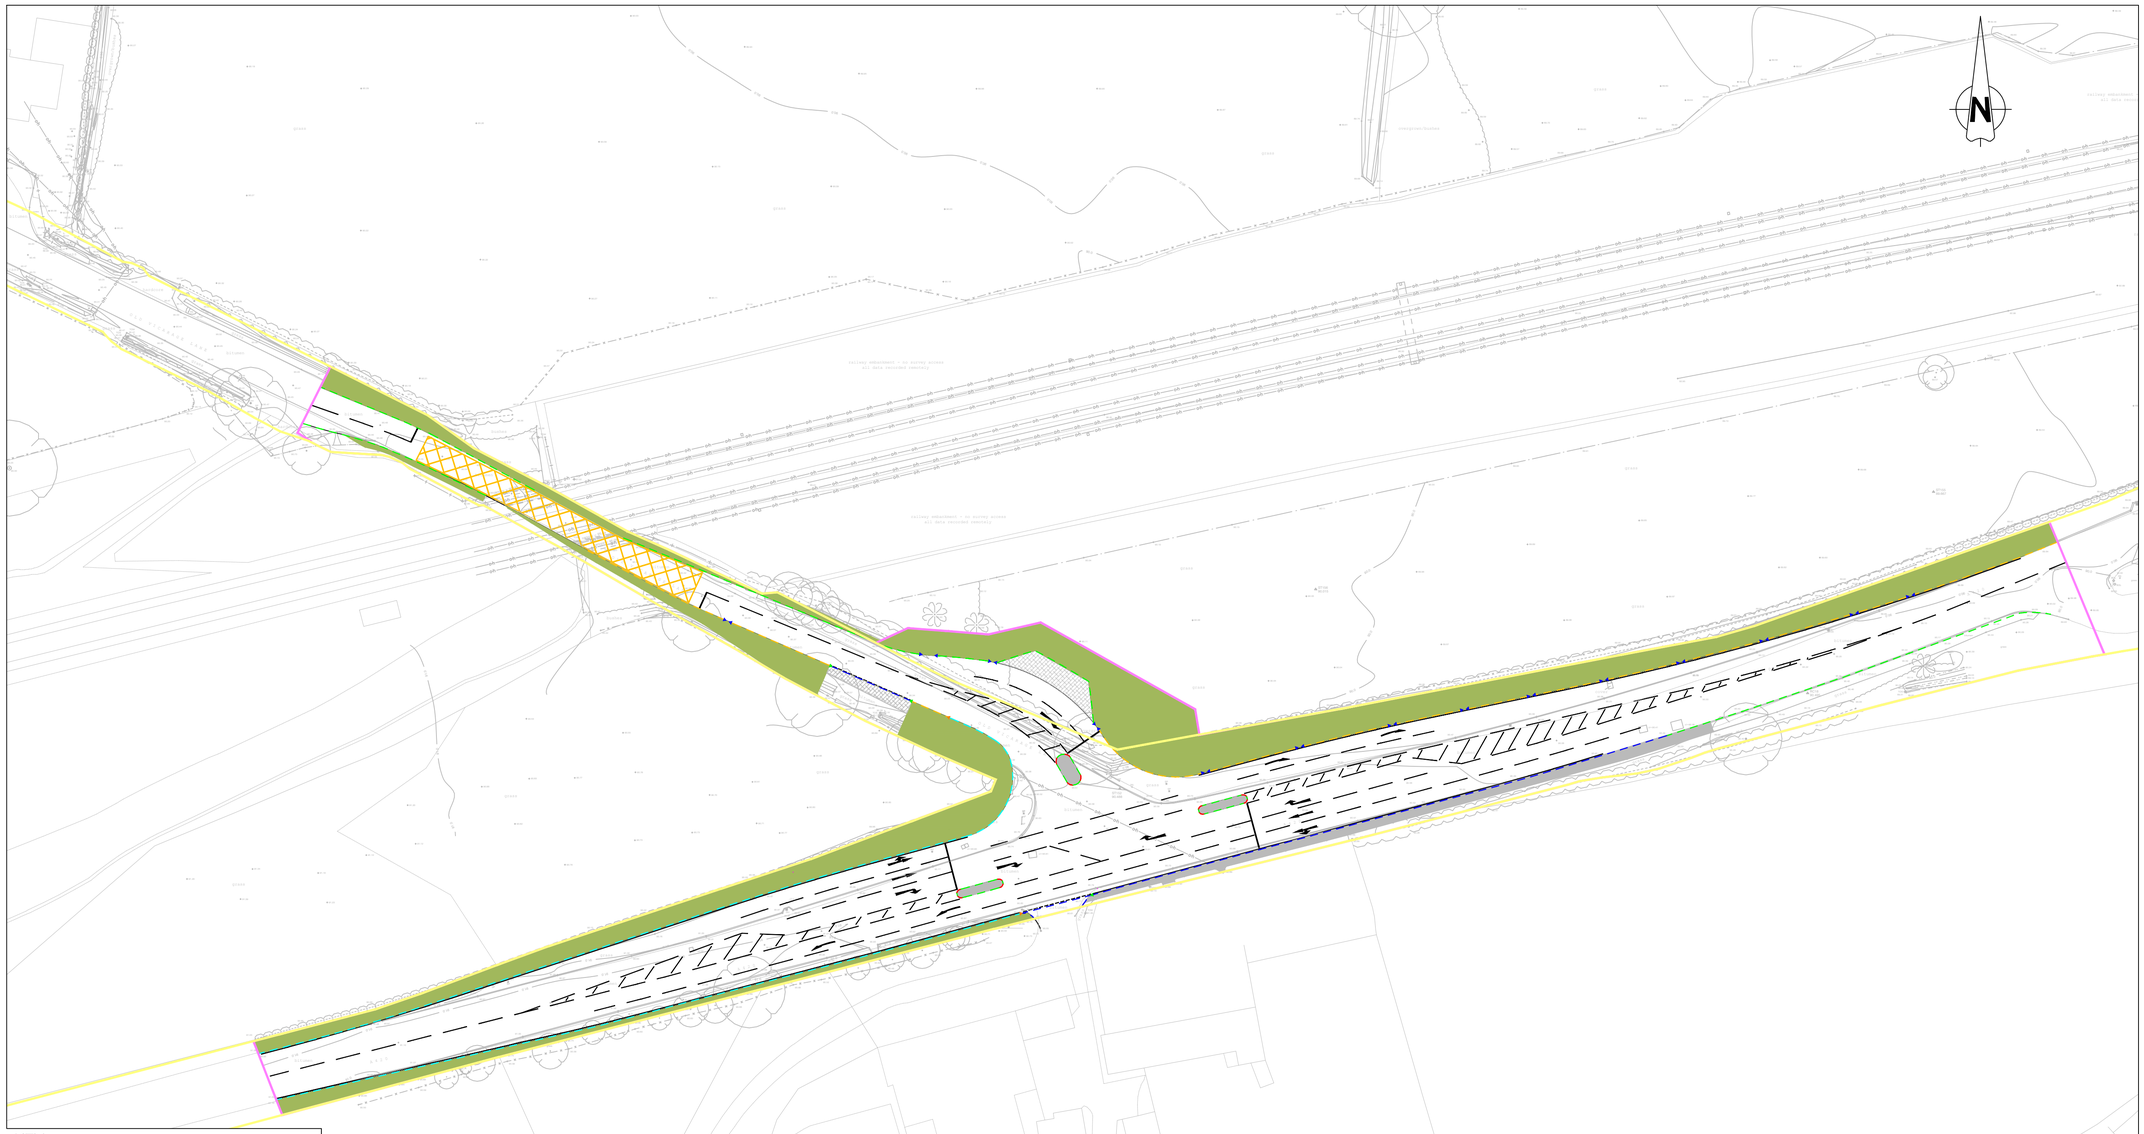

NOTES:

1. Do not scale from this drawing.
2. All dimensions are in metres unless otherwise stated.
3. Brookbanks consulting ltd has prepared this drawing for the sole use of the client. the drawing may not be relied upon by any other party without the express agreement of the client and Brookbanks consulting ltd. where any data supplied by the client or from other sources has been used, it has been assumed that the information is correct. no responsibility can be accepted by Brookbanks consulting ltd for inaccuracies in the data supplied by any other party. the drawing has been produced based on the assumption that all relevant information has been supplied by those bodies from whom it was requested.
4. No part of this drawing may be copied or duplicated without the express permission of Brookbanks consulting ltd.
5. All dimensions and all levels in metres unless noted otherwise.
6. Any discrepancies noted on site are to be reported to the engineer immediately.
7. Section 278 agreement highway works to carried out in strict accordance with Swindon Borough council's requirements.
8. All works within existing public highway, including any temporary works or traffic management measures, are subject to the approval of Swindon Borough Council. when works are required on the public highway, the contractor shall liaise with and obtain all statutory approvals from Swindon Borough Council, before commencing these works. these approvals include, but are not limited to, approval of traffic management measures, issue of works commencement notices, road opening notices, temporary traffic regulation orders etc.
9. All traffic management shall comply with the requirements as set out in chapter 8 of the traffic signs manual. warning signs may be erected outside the indicated boundaries. any obstructions to traffic or pedestrians shall be properly signed and protected with barriers, cones, signs, and lamps.
10. All planting in visibility splays to be agreed and approved by Swindon Borough Council and in all cases no planting to be above 600mm in height above the carriageway. also no obstructions of any kind within the visibility splay areas.
11. All tactile areas to be laid in accordance with detr "guidance on the use of tactile paving surfaces".
12. All traffic signs and road markings are to be in accordance with the 'Traffic Signs Regulations and General Directions 2016'.
13. Any damage caused to existing footways, roads or other third party property to be made good to the county engineers requirements.
14. Temporary works associated with the construction of the works shall be the responsibility of the contractor.
15. Existing highway boundary based off of OS information and SBC highways search land map.

TECHNICALLY APPROVED
29.11.2024

L	Minor amendment to southern access demarcation	CM	CM	SM	28.11.24
K	Updated following SBC TA4 minor comments	CDW	CM	SM	26.11.24
J	Updated following SBC TA3 comments	FH	CM	SM	08.11.24
H	Updated following TA2 comment	EG	CM	SM	27.09.24
G	Updated following TA1 comment	JHI	CM	SM	12.07.24
F	Alignment updated to remove the retaining wall. Refuge widened to accommodate signals.	LM	CM	SM	07.03.24
E	Drainage grips identified on drawing	CM	SM	SM	23.01.23
D	Boundary updated alongside retaining wall	CM	SM	SM	15.12.22
C	Cycle crossing and refuge updated	CM	SM	SM	11.10.22
B	Updated for S278 Submission	CM	SM	SM	03.08.22
A	Footway-Cycleway added to Signalised Junction	CM	SM	SM	30.06.22
-	First Issue	PS	DS	PAB	30.11.21

KEY:

- Areas of existing highway
- Proposed S278 boundary
- PCC 255x125mm half battered kerb (HB2) 125mm upstand
- PCC 255x125mm bull nosed kerb (BN) 0-6mm upstand @ crossings, 25mm @ laybys & across private accesses
- PCC 150x50mm flat top edging (EF) 0mm upstand
- PCC Beany block 45° splayed straight backed with base 205 unit (equivalent to a 300mm pipe) (BB), 100mm upstand
- PCC 125x255mm 45° splay kerb (SP) 125mm upstand
- PCC HB Quadrant Kerb 305x255mm
- PCC transition kerbs HB2/SP > BN
- PCC transition kerbs BB > HB2
- Dropped kerb inlet to retain existing drainage network. 150x125mm bull nose kerb as centre stone laid flush, with bullnose laid facing the verge
- Full footway construction
- Full verge construction (150mm topsoil and grass seeded)
- Grasscrete

Construction Design and Management (CDM)
Key Residual Risks

Contractors entering the site should gain permission from the relevant land owners and/or principle contractor working on site at the time of entry. Contractors shall be responsible for carrying out their own risk assessments and for liaising with the relevant services companies and authorities. Listed below are Site Specific key risks associated with the project.

1) Overhead and underground services
2) Street Lighting Cables
3) Working adjacent to water courses and flood plain
4) Soft ground conditions
5) Working adjacent to live highways and railway line
6) Unchartered services

UNTIL TECHNICAL APPROVAL HAS BEEN OBTAINED FROM THE RELEVANT LOCAL AUTHORITIES, IT SHOULD BE UNDERSTOOD THAT ALL DRAWINGS ARE ISSUED AS PRELIMINARY AND NOT FOR CONSTRUCTION. SHOULD THE CONTRACTOR COMMENCE SITE WORK PRIOR TO APPROVAL BEING GIVEN, IT IS ENTIRELY AT THEIR OWN RISK.

BROOKBANKS

6150 Knights Court, Solihull Parkway, Birmingham, B37 7WY
T +44 (0)203 958 5400 E mail@brookbanks.com
W brookbanks.com

Swindon EDAG

Swindon EDA

Vicarage Lane Signalised Junction Kerbs, Footways and Paved Area SBC TA S1057

Status		Status Date
Approval		NOV 2021
Drawn	**Checked**	**Date**
PS	DS	27.09.24
Scale	**Number**	**Rev**
1:500	1335/HL/58/1100	L

0 10 20 30 40 50
METRES

© Brookbanks Consulting Limited 2024
P:\1335\CAD\BCL\Current Drawings\S278-Vicarage Lane-Signalised Junction\Technically Approved\1335-HL-058-1100L Kerbs, Footways and Paved Areas.dwg