Original Drawing Size A1

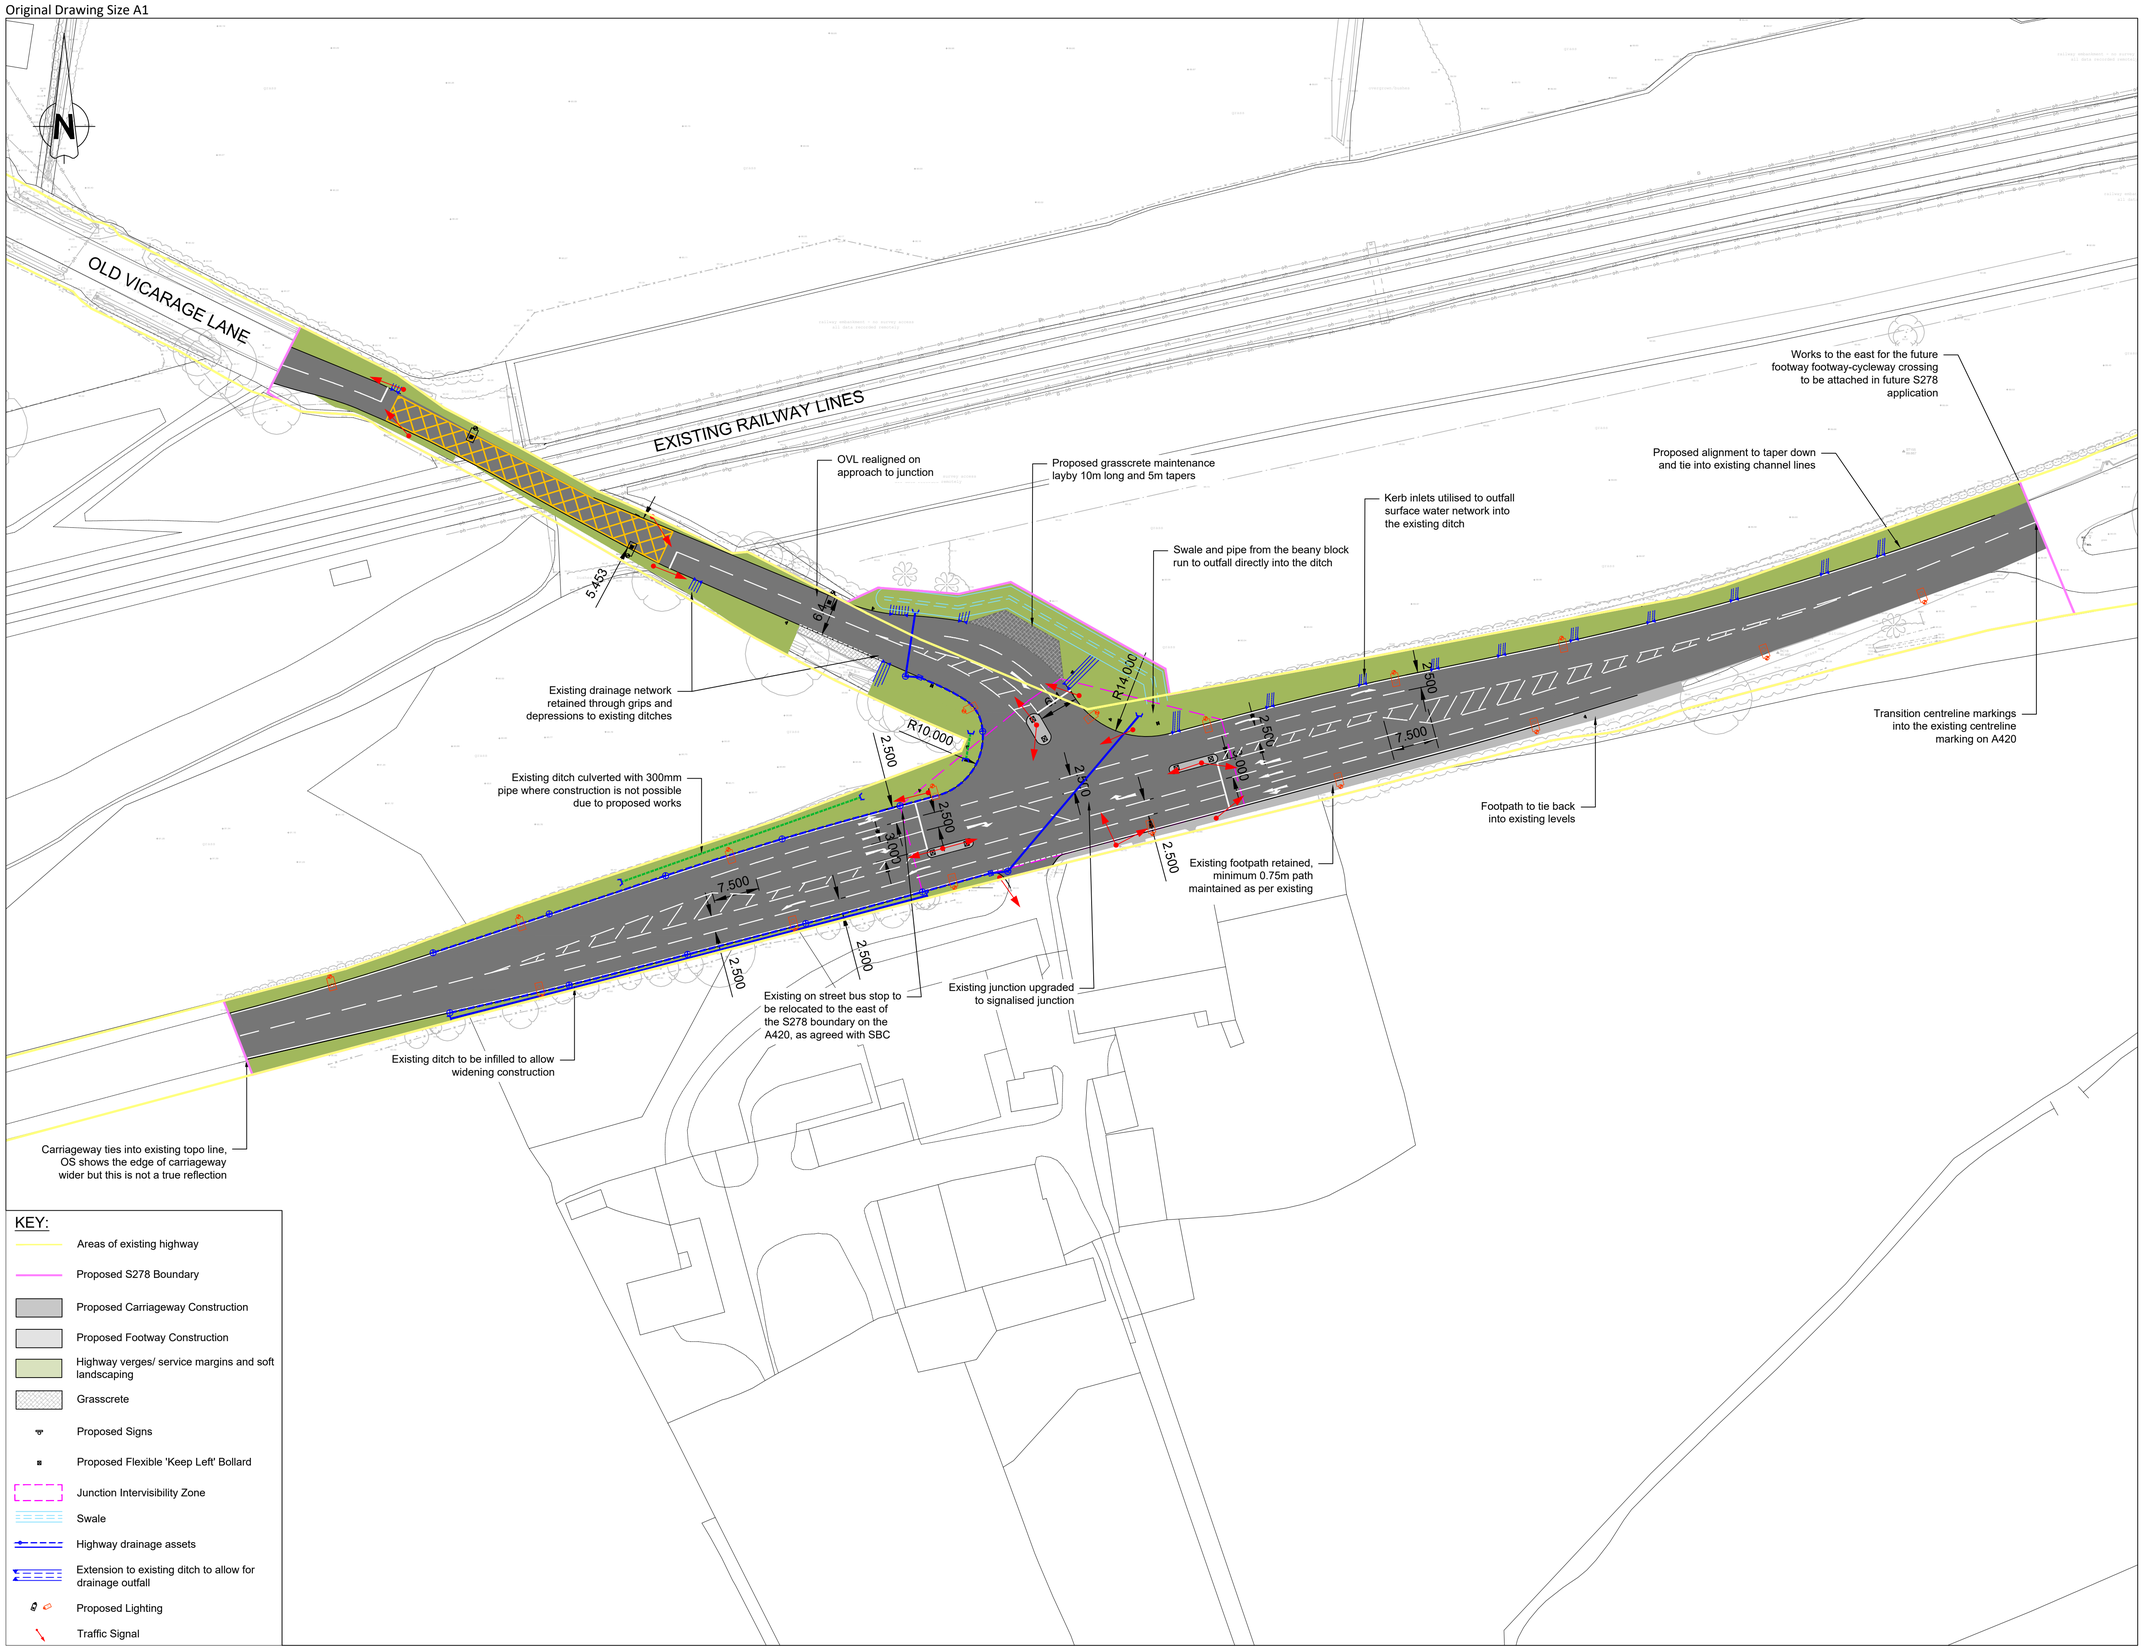

Construction Design and Management (CDM)
Key Residual Risks

Contractors entering the site should gain permission from the relevant land owners and/or principle contractor working on site at the time of entry. Contractors shall be responsible for carrying out their own risk assessments and for liaising with the relevant services companies and authorities. Listed below are Site Specific key risks associated with the project.

1) Overhead and underground services
2) Street Lighting Cables
3) Working adjacent to water courses and flood plain
4) Soft ground conditions
5) Working adjacent to live highways and railway line
6) Unchartered services

NOTES:

1. Do not scale from this drawing.
2. All dimensions are in metres unless otherwise stated.
3. Brookbanks consulting ltd has prepared this drawing for the sole use of the client. the drawing may not be relied upon by any other party without the express agreement of the client and Brookbanks consulting ltd. where any data supplied by the client or from other sources has been used, it has been assumed that the information is correct. no responsibility can be accepted by Brookbanks consulting ltd for inaccuracies in the data supplied by any other party. the drawing has been produced based on the assumption that all relevant information has been supplied by those bodies from whom it was requested.
4. No part of this drawing may be copied or duplicated without the express permission of Brookbanks consulting ltd.
5. All dimensions and all levels in metres unless noted otherwise.
6. Any discrepancies noted on site are to be reported to the engineer immediately.
7. Section 278 agreement highway works to carried out in strict accordance with Swindon Borough council's requirements.
8. All works within existing public highway, including any temporary works or traffic management measures, are subject to the approval of Swindon Borough Council. when works are required on the public highway, the contractor shall liaise with and obtain all statutory approvals from Swindon Borough Council, before commencing these works. these approvals include, but are not limited to, approval of traffic management measures, issue of works commencement notices, road opening notices, temporary traffic regulation orders etc.
9. All traffic management shall comply with the requirements as set out in chapter 8 of the traffic signs manual. warning signs may be erected outside the indicated boundaries. any obstructions to traffic or pedestrians shall be properly signed and protected with barriers, cones, signs, and lamps.
10. All planting in visibility splays to be agreed and approved by Swindon Borough Council and in all cases no planting to be above 600mm in height above the carriageway. also no obstructions of any kind within the visibility splay areas.
11. All tactile areas to be laid in accordance with DfT "guidance on the use of tactile paving surfaces".
12. All traffic signs and road markings are to be in accordance with the 'Traffic Signs Regulations and General Directions 2016'.
13. Any damage caused to existing footways, roads or other third party property to be made good to the county engineers requirements.
14. Temporary works associated with the construction of the works shall be the responsibility of the contractor.
15. The Highway Agreements Clerk of Works is to be present during construction and CBR testing for inspections.
16. Detailed traffic signal design to be completed by Siemens.
17. New road layout ahead signs are to be removed by the contractor after 3 months of completing the roundabout.
18. Developer and appointed contractors shall arrange pre-start meeting with SBC clerk of works a minimum of 1 week prior to works commencing.
19. For traffic signals drawing, please refer to Yunex drawing '67126708-YU-00-XX-DR-Y-0001 P1'.
20. For street lighting drawing, please refer to WLC drawing reference 'WLC612-2-1300-001_R1_Lighting'.

TECHNICALLY APPROVED
29.11.2024

N	Catchpit Locations Amended	CDW	CM	SM	28.11.24
M	Updated following SBC TA4 minor comments	CDW	CM	SM	26.11.24
L	Updated following SBC TA3 comments	FH	CM	SM	08.11.24
K	Updated following TA2 comment	EG	CM	SM	27.09.24
J	Updated following TA1 comment	JHI	CM	SM	12.07.24
H	Alignment updated to remove the retaining wall. Refuge widened to accommodate signals.	LM	CM	SM	07.03.24
G	OS boundary added to drawing	CM	SM	SM	14.12.22
F	Boundary updated alongside retaining wall	CM	SM	SM	25.11.22
E	Cycle crossing and refuge updated	CM	SM	SM	11.10.22
D	Updated for S278 Submission	CM	SM	SM	03.08.22
C	Footway-Cycleway added to Signalised Junction	CM	SM	SM	30.06.22
B	Site Boundary and Layout Updated	CL	DS	DS	16.11.21
A	Layout updated	PS	DS	PAB	04.09.19
-	First Issue	PS	DS	PAB	01.02.19

BROOKBANKS

6150 Knights Court, Solihull Parkway, Birmingham, B37 7WY
T +44 (0)203 958 5400 E mail@brookbanks.com
W brookbanks.com

Swindon EDAG

Swindon EDA

Vicarage Lane - Signalised Junction General Arrangement SBC TA S1057

Status		Status Date
Approval		Feb' 2019
Drawn	Checked	Date
PS	DS	27.09.24
Scale	Number	Rev
1:500	1335/HL/58/100	N

0 10 20 30 40 50
METRES

UNTIL TECHNICAL APPROVAL HAS BEEN OBTAINED FROM THE RELEVANT LOCAL AUTHORITIES, IT SHOULD BE UNDERSTOOD THAT ALL DRAWINGS ARE ISSUED AS PRELIMINARY AND NOT FOR CONSTRUCTION. SHOULD THE CONTRACTOR COMMENCE SITE WORK PRIOR TO APPROVAL BEING GIVEN, IT IS ENTIRELY AT HIS OWN RISK.

© Brookbanks Consulting Limited 2024

P:\1335\CAD\BCL\Current Drawings\S278-Vicarage Lane-Signalised Junction\Technically Approved\L335-HL-058-100N General Arrangement.dwg