# Maintenance Regime (Pond/Watercourse) - Swindon R8 & R9

| | No of Visits (days) |
|---|---|
| **Grass Cutting:** | |
| Grass cutting to the ditch margin will be required from the months of April through September, on a 2 to 4 week cycle (month dependant) (Machinery, commercial ride on mover and hand strimming), with the grass being cut in height between 3 - 4 inches (75mm - 100mm), including the watercourse margin. All grass cutting to be collected and disposed of to the appropriate recycling point. | 26 |
| **Litter / Debris Collection:** | |
| Collection of litter and debris will be undertaken at the same time as the Grass cutting programme, however, additional visits will need to be undertaken outside of the period. It is recommended that additional visits are undertaken monthly. | 6 |
| **Removal of Sediment:** | |
| Sediment removal to be undertaken on 6 monthly basis, for the first 24 months of the ponds life (Machinery 5 Tonne tracked Excavator), this is until vegetation has been establised, thereafter undertaken on a 12 monthly cycle. At least one visit maybe co-ordinated with grass cutting. As the watercourses are existing, sediment removal to be monitored yearly and undertaken in Oct/Nov as required. | 1 |
| **Visual Check following Storm to Ditch/HEadwalls/Flow Control/Watercourse:** | |
| It will be necessary to visit site following periods of intense rainfall, to ensure the functionality of the pond/watercourses/flow control chamber/watercourse beneath the bridge deck, as debris etc.. could potentially block outfall pipework/watercourse. Obviously a difficult one to predict therefore assuming 3 additional visits. Full visual review of watercourse adjacent development parcel | 3 |
| **Vegetation Clearance:** | |
| Clearance of vegetation / shrubs / overhanging trees shall undertaken outside of the bird nesting season (1 March - 31 July) | 2 |
| **Maintenance Checklist:** | |
| Maintenance Inspection Checklist to be undertaken at each site visit, inline with all the above criteria, thereafter, (Oct - Mar) monthly visits to be undertaken in the first 18 months of the pond life, thereafter extended to 8 wk intervals, Site Manager to hold records | 2 |

## Typical Annual Programme of Works

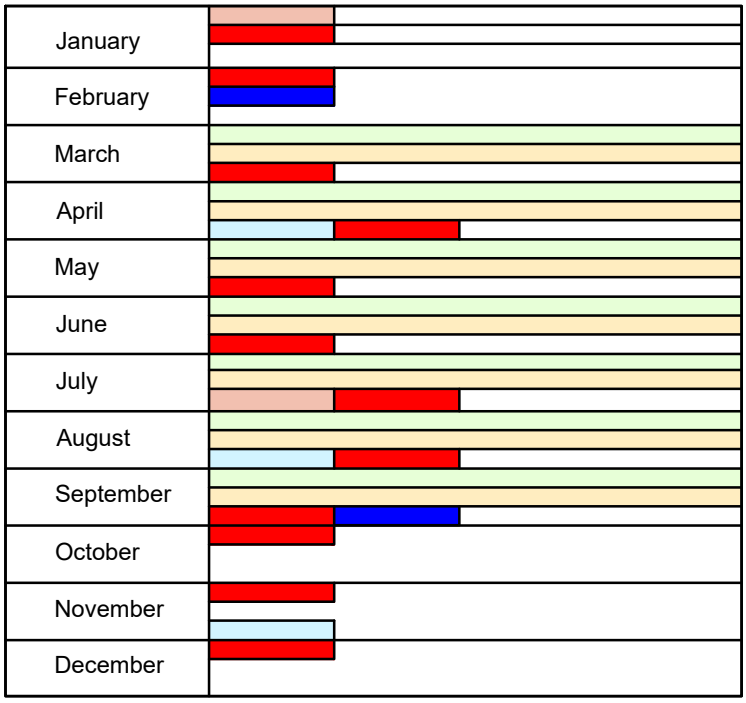


- Grass Cutting
- Debris / Litter collection
- Silt Removal
- Visual rainfall check
- Complete Check list
- Vegetation Clearance

Maintenance Contractors

Please Note Taylor Wimpey will be responsible for all aspects of maintenance until handed over to the Private Management company or Icosa Water (Storm and Foul Sewers).

It is envisaged there will be a 2.5 year build programme, whereby the assets will then go onto a maintenance programme before final responsibilities are handed over to the

**EMERGENCY CALL OUT NUMBER:**

**01454 628417**

Taylor Wimpey

September 2024