Original Drawing Size A1

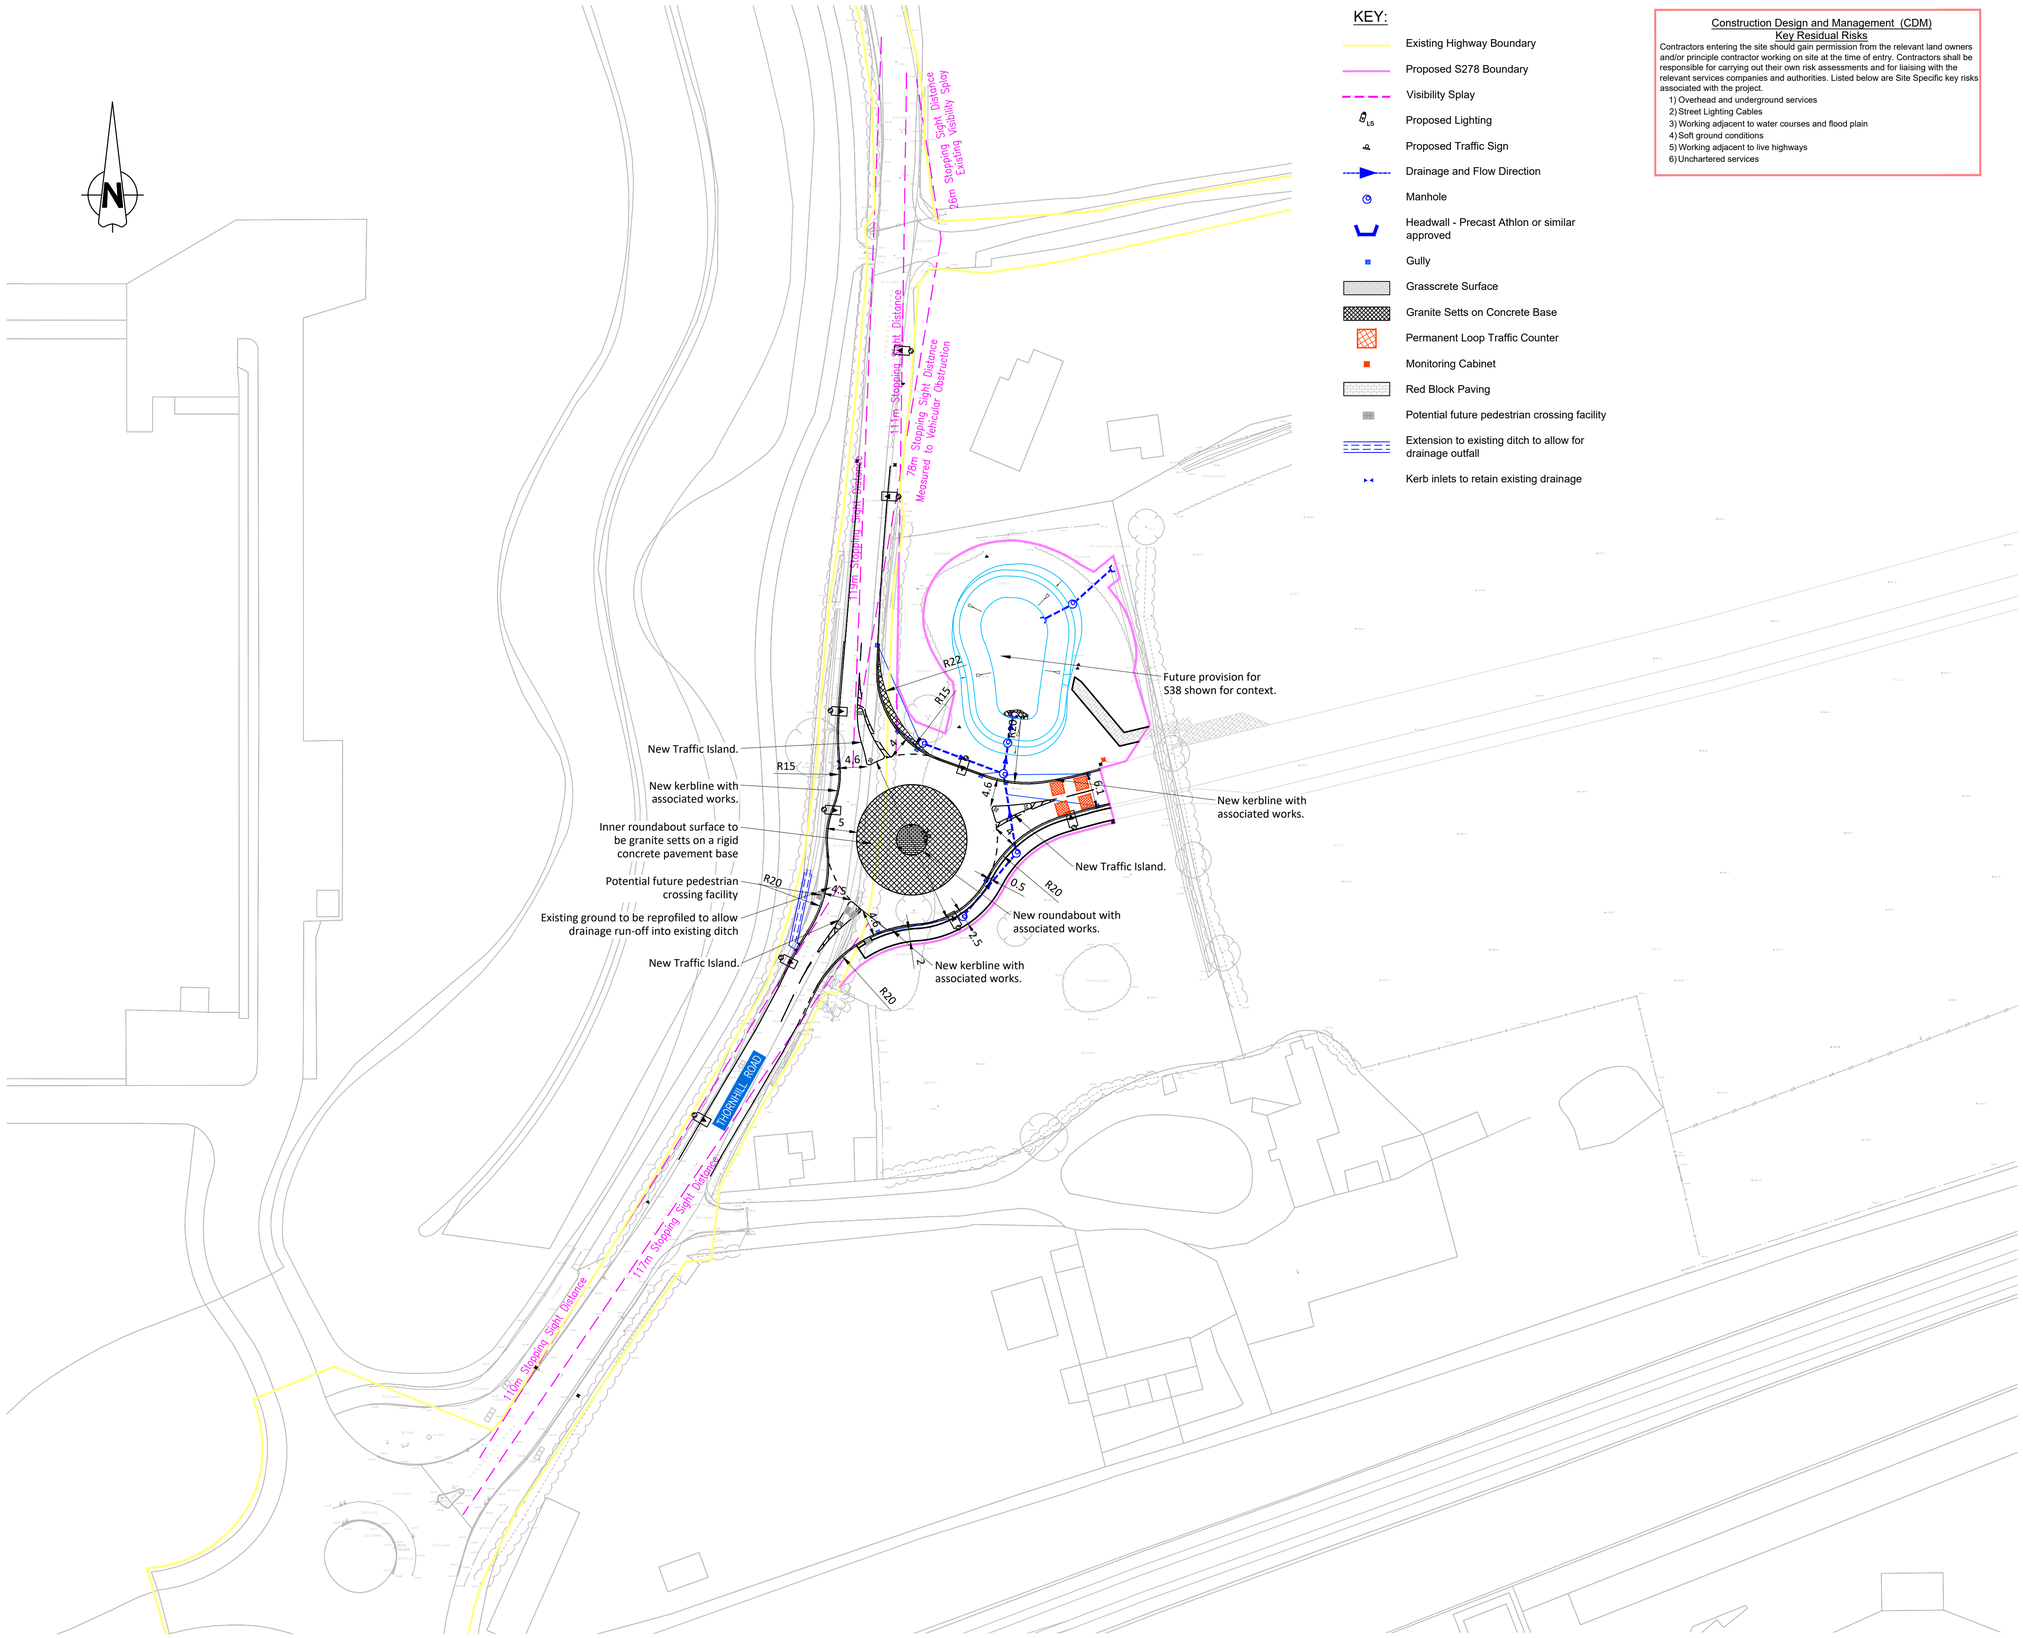

KEY:

- Existing Highway Boundary
- Proposed S278 Boundary
- Visibility Splay
- Proposed Lighting
- Proposed Traffic Sign
- Drainage and Flow Direction
- Manhole
- Headwall - Precast Athlon or similar approved
- Gully
- Grasscrete Surface
- Granite Setts on Concrete Base
- Permanent Loop Traffic Counter
- Monitoring Cabinet
- Red Block Paving
- Potential future pedestrian crossing facility
- Extension to existing ditch to allow for drainage outfall
- Kerb inlets to retain existing drainage

Construction Design and Management (CDM) Key Residual Risks

Contractors entering the site should gain permission from the relevant land owners and/or principle contractor working on site at the time of entry. Contractors shall be responsible for carrying out their own risk assessments and for liaising with the relevant services companies and authorities. Listed below are Site Specific key risks associated with the project.

1) Overhead and underground services
2) Street Lighting Cables
3) Working adjacent to water courses and flood plain
4) Soft ground conditions
5) Working adjacent to live highways
6) Unchartered services

NOTES:

1. Do not scale from this drawing.
2. All dimensions are in metres unless otherwise stated.
3. Brookbanks consulting ltd has prepared this drawing for the sole use of the client. the drawing may not be relied upon by any other party without the express agreement of the client and Brookbanks consulting ltd. where any data supplied by the client or from other sources has been used, it has been assumed that the information is correct. no responsibility can be accepted by Brookbanks consulting ltd for inaccuracies in the data supplied by any other party. the drawing has been produced based on the assumption that all relevant information has been supplied by those bodies from whom it was requested.
4. No part of this drawing may be copied or duplicated without the express permission of Brookbanks consulting ltd.
5. All dimensions and all levels in metres unless noted otherwise.
6. Any discrepancies noted on site are to be reported to the engineer immediately.
7. Section 278 agreement highway works to carried out in strict accordance with Swindon Borough council's requirements.
8. All works within existing public highway, including any temporary works or traffic management measures, are subject to the approval of Swindon Borough Council. when works are required on the public highway, the contractor shall liaise with and obtain all statutory approvals from Swindon Borough Council, before commencing these works. these approvals include, but are not limited to, approval of traffic management measures, issue of works commencement notices, road opening notices, temporary traffic regulation orders etc.
9. All traffic management shall comply with the requirements as set out in chapter 8 of the traffic signs manual. warning signs may be erected outside the indicated boundaries. any obstructions to traffic or pedestrians shall be properly signed and protected with barriers, cones, signs, and lamps.
10. All planting in visibility splays to be agreed and approved by Swindon Borough Council and in all cases no planting to be above 600mm in height above the carriageway. also no obstructions of any kind within the visibility splay areas.
11. All tactile areas to be laid in accordance with detr "guidance on the use of tactile paving surfaces".
12. All traffic signs and road markings are to be in accordance with the 'Traffic Signs Regulations and General Directions 2016'.
13. Any damage caused to existing footways, roads or other third party property to be made good to the county engineers requirements.
14. Temporary works associated with the construction of the works shall be the responsibility of the contractor.
15. The Highway Agreement's Clerk of Works is to be present during construction and CBR testing for inspections.
16. Permanent loop counter is to monitor the volume and classification of vehicles (Euro 6), whilst also providing the speed of vehicles on approach to the junction. Suitable loop equipment should be provided by a company such as Tagmaster, or similar approved. Monitering equipment is to operate via telemetry with a view to sending regular updates to Swindon Borough Council's Drakewell C2 account upon adoption. Cabinets will need to be solar-powered and a robust maintenance schedule will be required to ensure that the monitoring equipment remains operational.

S	Updated with latest lighting layout	CDW	CM	SM	13.11.23
R	Updated following SBC TA4 comment 24/10/23	CM	CM	SM	03.11.23
Q	Updated following SBC TA3.1 comments 18/10/23	BM	CM	SM	19.10.23
P	Updated following SBC TA3 comment 12/10	CM	CM	SM	18.10.23
N	Updated following SBC TA2 comment 26/09	CDW	CM	SM	06.10.23
M	Drainage updated following comment	CM	CM	SM	20.09.23
L	Amendment to drainage and signs model	CM	CM	SM	23.08.23
K	Pedestrian crossing added to southern side	CM	CM	SM	10.07.23
J	Traffic sensors added to road and note added	CDW	CM	SM	13.01.23
H	Development boundary removed	CDW	CM	SM	05.01.23
G	Updated following RSA comment	CM	SM	SM	20.09.22
F	Updated for SBC submission	CM	SM	SM	01.08.22
E	Design principles added	CM	SM	RM	12.07.22
D	Updated to comments received from SBC June 2022	CDW	SM	RM	01.07.22
C	Footpath North of Roundabout Removed	CM	SM	RM	08.06.22
B	Pedestrian/Cycle route dimensions added	HG	SM	SM	11.03.22
A	Updated S278 Boundary & Drainage Design	CDW	SM	RM	24.02.22
-	First Issue	PS	DS	PAB	30.01.19

BROOKBANKS

6150 Knights Court, Solihull Parkway, Birmingham, B37 7WY
T +44 (0)203 958 5400 E mail@brookbanks.com
W brookbanks.com

Swindon EDAG

Swindon EDA

Thornhill Road General Arrangement SBC TA S1055 Option 3

Status		Status Date
Approval		JAN' 2019
Drawn	**Checked**	**Date**
PS	DS	30.01.19
Scale	**Number**	**Rev**
1:500	1335/HL/56/100	S

0 10 20 30 40 50
METRES

UNTIL TECHNICAL APPROVAL HAS BEEN OBTAINED FROM THE RELEVANT LOCAL AUTHORITIES, IT SHOULD BE UNDERSTOOD THAT ALL DRAWINGS ARE ISSUED AS PRELIMINARY AND NOT FOR CONSTRUCTION. SHOULD THE CONTRACTOR COMMENCE SITE WORK PRIOR TO APPROVAL BEING GIVEN, IT IS ENTIRELY AT HIS OWN RISK.

© Brookbanks Consulting Limited 2023

P:\1335\CAD\BCL\Current Drawings\S278-Thornhill Road\1335-HL-056-100S General Arrangement.dwg