BROOKBANKS

1335 Swindon NEV

Technical Note No.62 Rv1 Foul Water Pumping Station Drainage Strategy
7th January 2024

1 Introduction

1.1 Brookbanks is appointed by the Swindon Eastern Villages Consortium to provide technical support for a residential-led scheme development at South Marston and Rowborough to the east of Swindon, together with areas of mixed use comprising: community; employment; education; local retail uses; and formal and informal open space provision on land east of Swindon and north of A420.

1.2 This note has been prepared to support the RMA for the South Marston Foul Water Pumping Station. It confirms that the small area of hardstanding associated with the pumping station will be drained via a small filter drain to the proposed swale network delivered in accordance with the approved drainage strategy set out in Condition 40.

2 Proposed Works

2.1 The proposed Foul Water Pumping Station (FWPS) is situated to the west of Old Vicarage Lane in an open green space area. It will be accessed via a grasscrete vehicle crossover. The permeable nature of the grasscrete construction will allow water to infiltrate through the proposed surface as existing.

2.2 There is a 22.5m x 28m concrete slab which will be installed for the base of the FWPS. From the FFL of 90.5, there will be a gradient of 1:500 sloping towards the eastern side of the FWPS. From this point, a filter drain will be used to collect the surface water run-off and convey it into the nearby swale which is carrying water to the outfall in Rowborough.

2.3 The area of hardstanding is negligible and is not perceived to increase flood risk, however it will be managed within the site wide swale network shown in accordance with the site wide drainage strategy. The outfall and filter drain will be managed and maintained by the owners of the foul pump station.

2.4 The figures below give detail on drainage layout and filter drain detail. Further information is provided on the drawings submitted with the application.

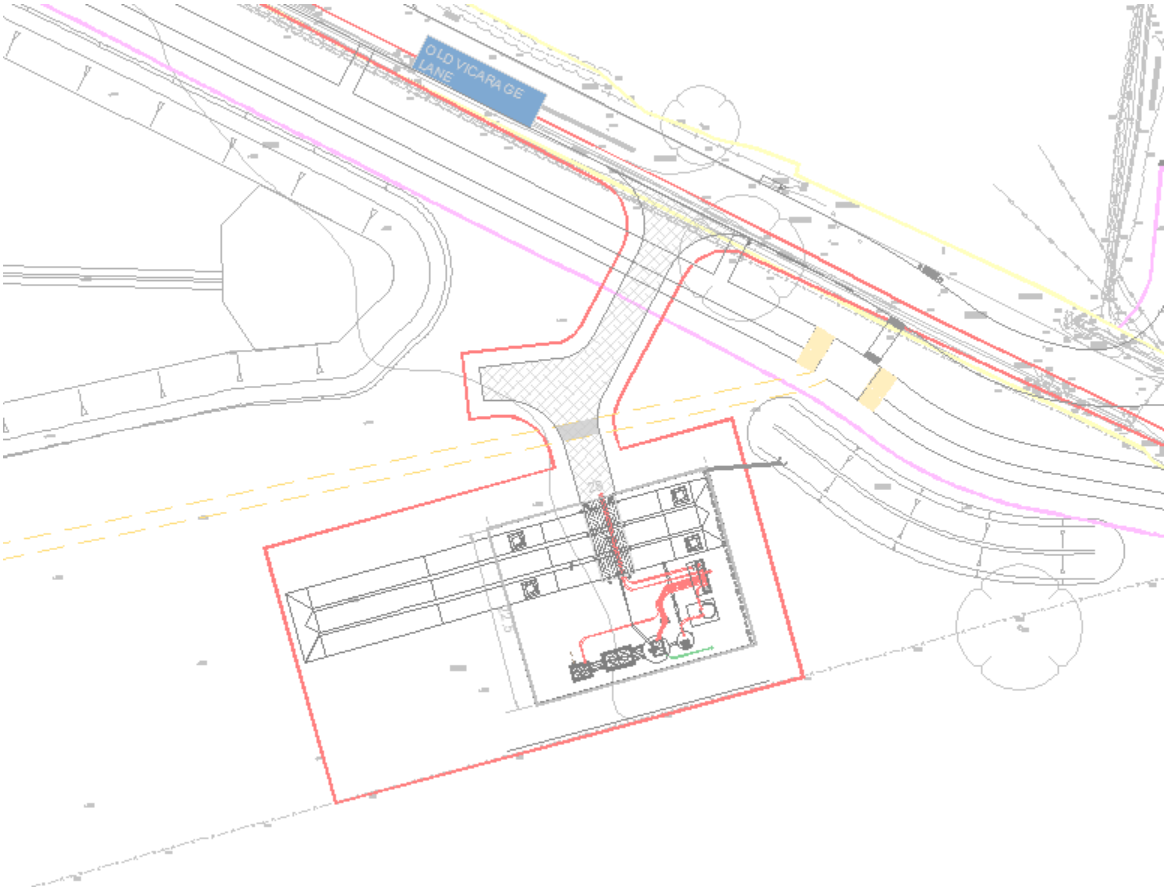

Figure 1-1: Proposed General Arrangement, filter drain and outfall to the east

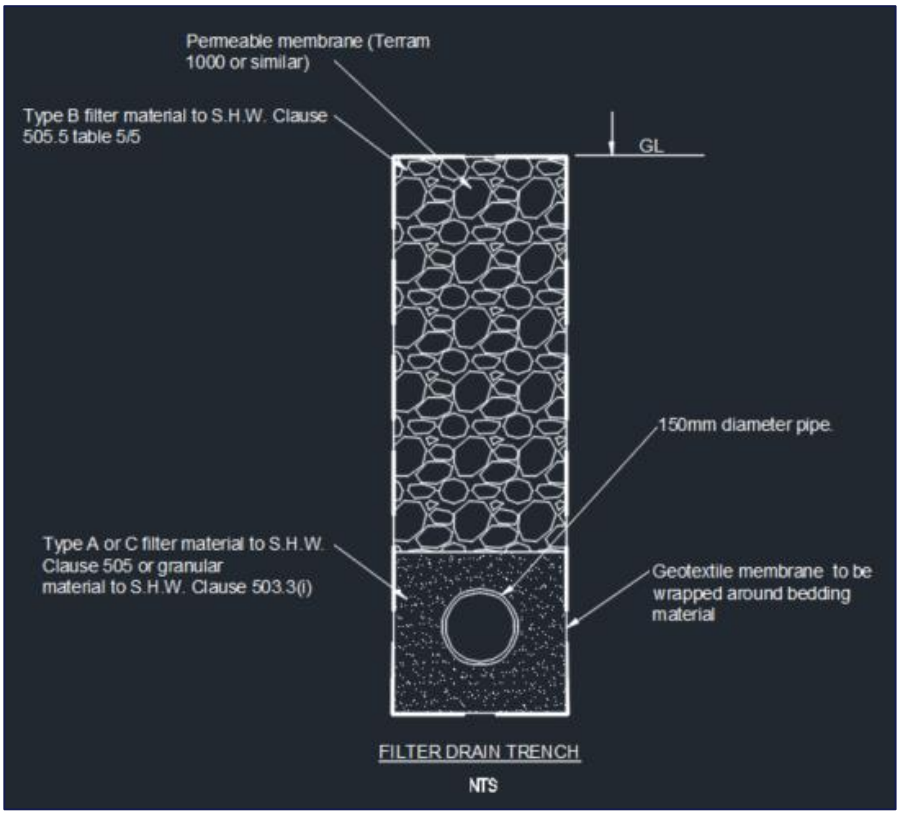

Figure 1-2: Typical Filter drain detail

3 Next Steps and recommendation

3.1 This note has detailed the proposed surface water drainage for the proposed pumping station. The runoff will be managed via the site wide surface water network.

3.2 The foul pumping station will be subject to detailed design and adoption with the foul undertaker.