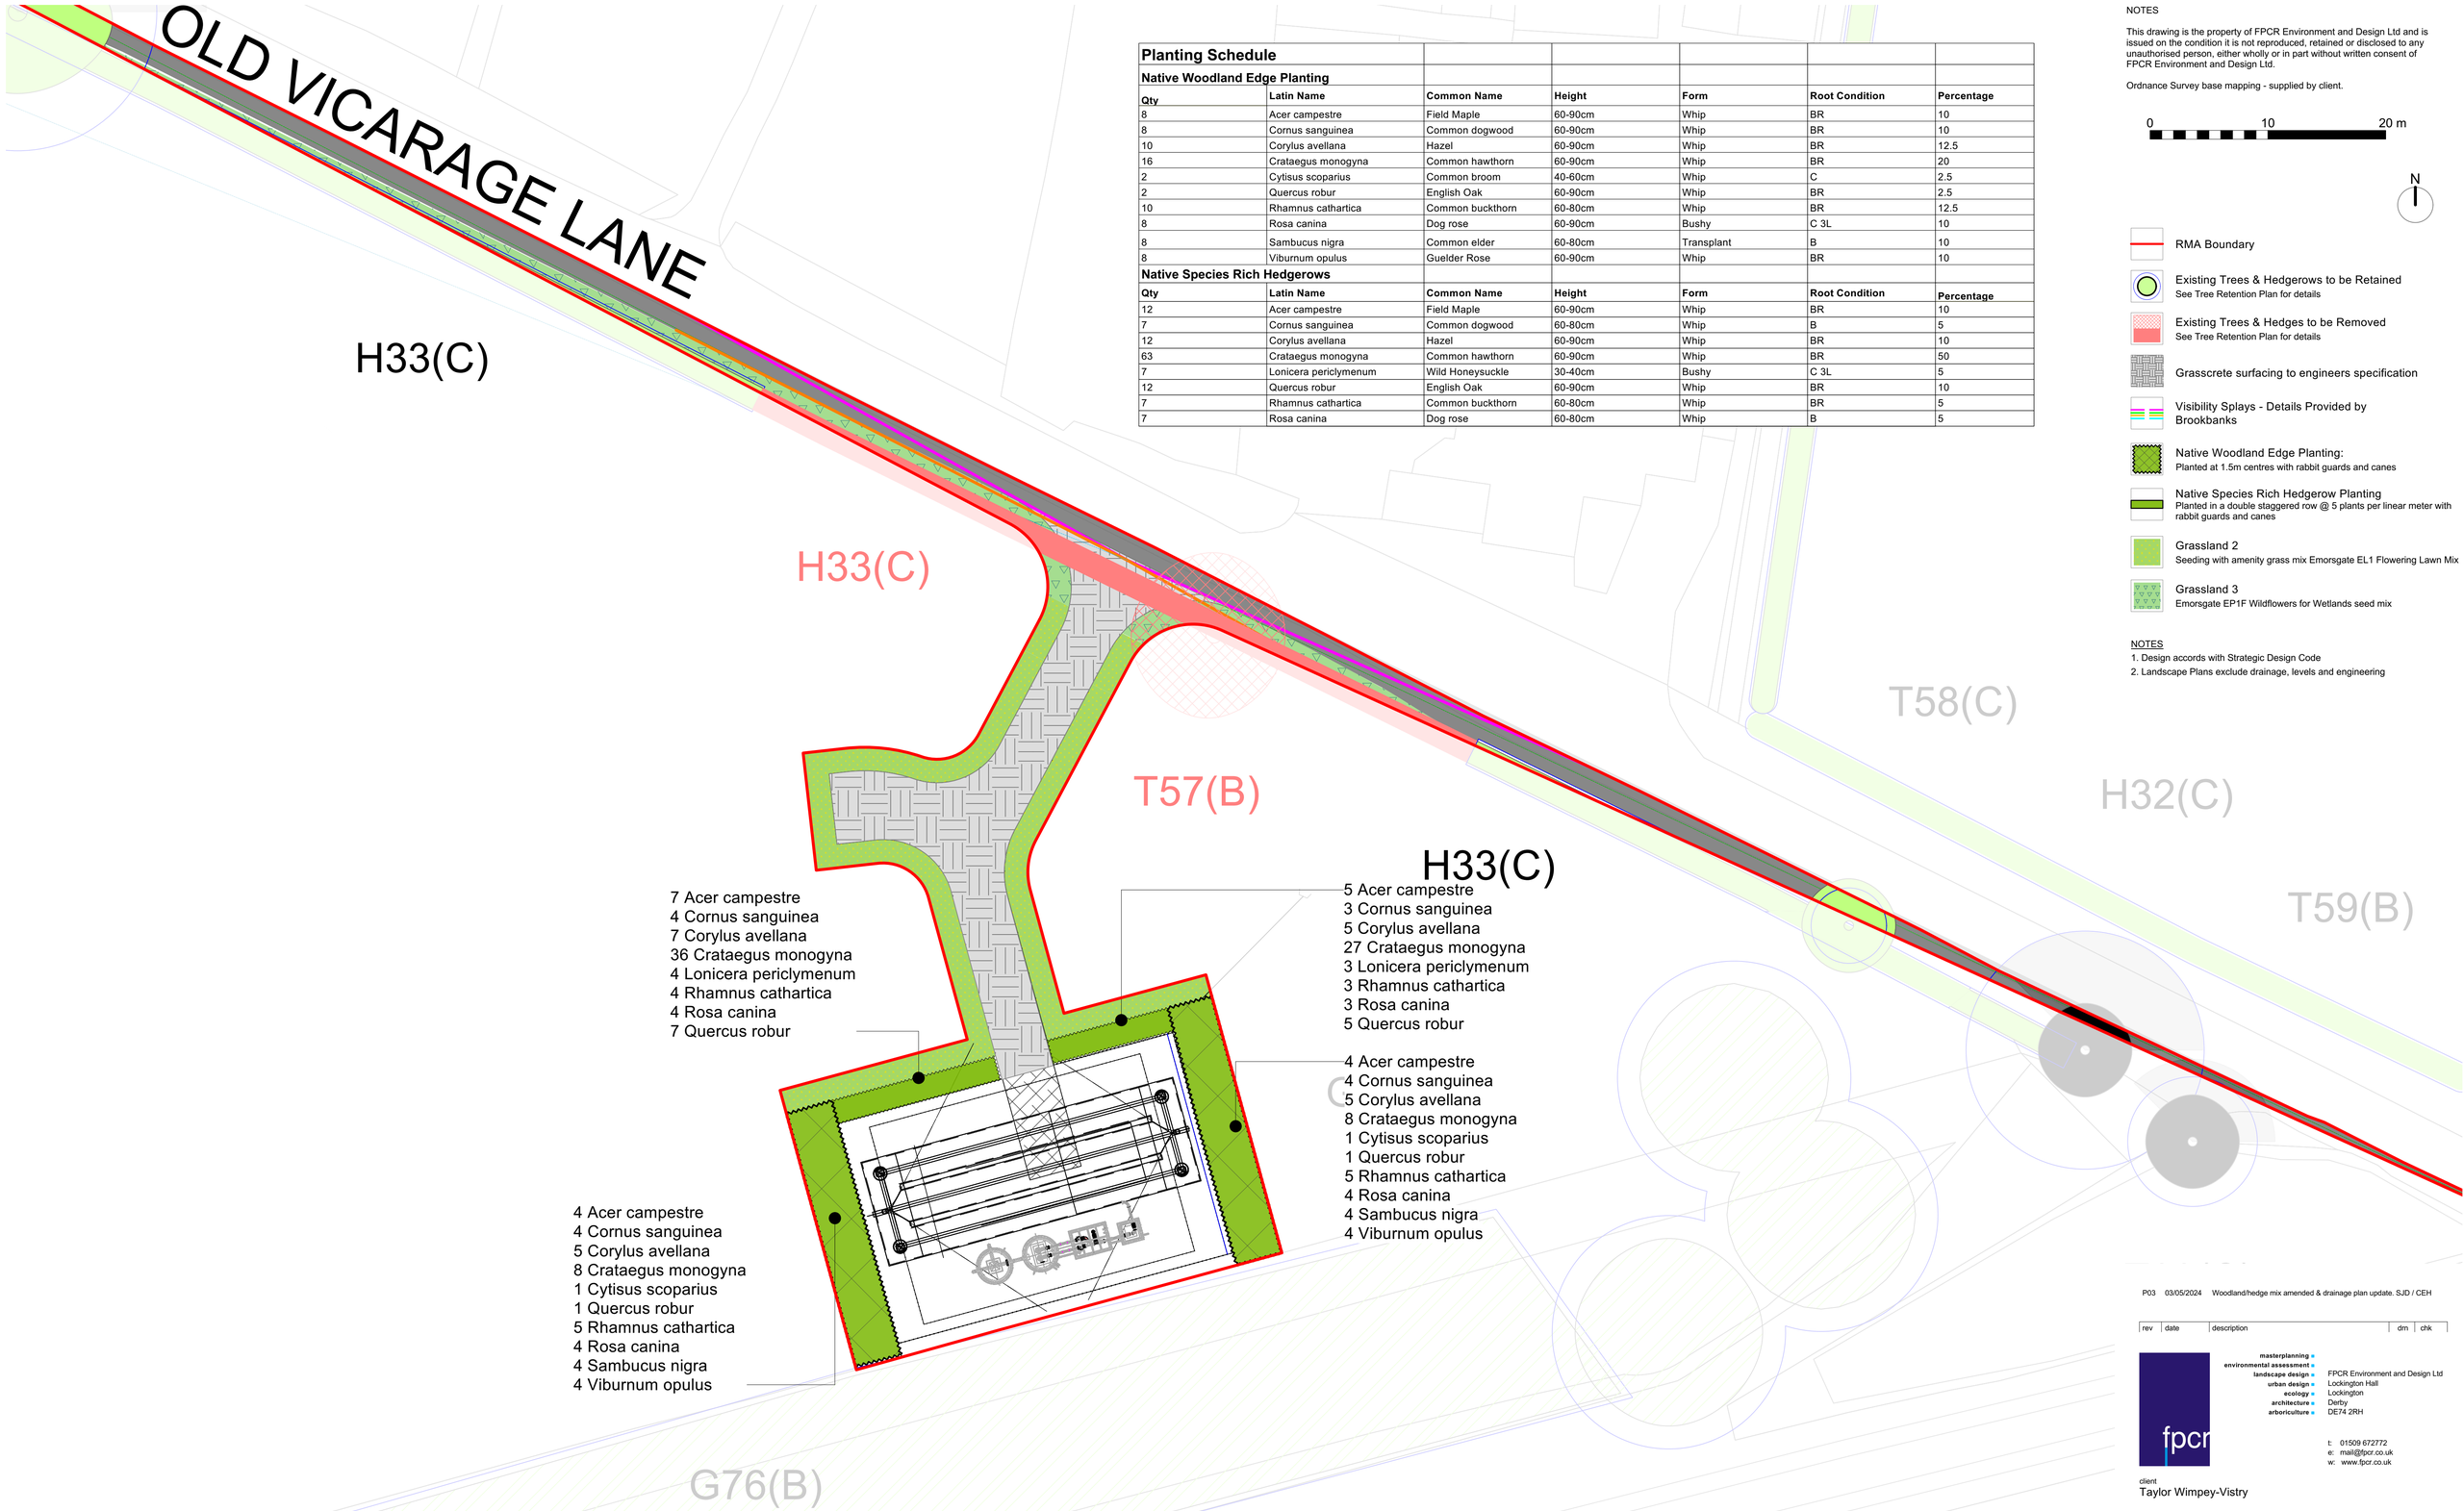

Planting Schedule

Native Woodland Edge Planting

Qty	Latin Name	Common Name	Height	Form	Root Condition	Percentage
8	Acer campestre	Field Maple	60-90cm	Whip	BR	10
8	Cornus sanguinea	Common dogwood	60-90cm	Whip	BR	10
10	Corylus avellana	Hazel	60-90cm	Whip	BR	12.5
16	Crataegus monogyna	Common hawthorn	60-90cm	Whip	BR	20
2	Cytisus scoparius	Common broom	40-60cm	Whip	C	2.5
2	Quercus robur	English Oak	60-90cm	Whip	BR	2.5
10	Rhamnus cathartica	Common buckthorn	60-80cm	Whip	BR	12.5
8	Rosa canina	Dog rose	60-90cm	Bushy	C 3L	10
8	Sambucus nigra	Common elder	60-80cm	Transplant	B	10
8	Viburnum opulus	Guelder Rose	60-90cm	Whip	BR	10

Native Species Rich Hedgerows

Qty	Latin Name	Common Name	Height	Form	Root Condition	Percentage
12	Acer campestre	Field Maple	60-90cm	Whip	BR	10
7	Cornus sanguinea	Common dogwood	60-80cm	Whip	B	5
12	Corylus avellana	Hazel	60-90cm	Whip	BR	10
63	Crataegus monogyna	Common hawthorn	60-90cm	Whip	BR	50
7	Lonicera periclymenum	Wild Honeysuckle	30-40cm	Bushy	C 3L	5
12	Quercus robur	English Oak	60-90cm	Whip	BR	10
7	Rhamnus cathartica	Common buckthorn	60-80cm	Whip	BR	5
7	Rosa canina	Dog rose	60-80cm	Whip	B	5

NOTES

This drawing is the property of FPCR Environment and Design Ltd and is issued on the condition it is not reproduced, retained or disclosed to any unauthorised person, either wholly or in part without written consent of FPCR Environment and Design Ltd.

Ordnance Survey base mapping - supplied by client.

0 10 20 m

N

RMA Boundary

Existing Trees & Hedgerows to be Retained
See Tree Retention Plan for details

Existing Trees & Hedges to be Removed
See Tree Retention Plan for details

Grasscrete surfacing to engineers specification

Visibility Splays - Details Provided by Brookbanks

Native Woodland Edge Planting:
Planted at 1.5m centres with rabbit guards and canes

Native Species Rich Hedgerow Planting
Planted in a double staggered row @ 5 plants per linear meter with rabbit guards and canes

Grassland 2
Seeding with amenity grass mix Emorsgate EL1 Flowering Lawn Mix

Grassland 3
Emorsgate EP1F Wildflowers for Wetlands seed mix

NOTES
1. Design accords with Strategic Design Code
2. Landscape Plans exclude drainage, levels and engineering

rev	date	description	drn	chk
P03	03/05/2024	Woodland/hedge mix amended & drainage plan update. SJD / CEH		

masterplanning
environmental assessment
landscape design
urban design
ecology
architecture
arboriculture

FPCR Environment and Design Ltd
Lockington Hall
Lockington
Derby
DE74 2RH

t: 01509 672772
e: mail@fpcr.co.uk
w: www.fpcr.co.uk

client
Taylor Wimpey-Vistry

project
Land North of A420 South Marston and Rowborough, Swindon

drawing title
PUMPING STATION LANDSCAPE PLAN

scale	drn	chk	date created
1:250 @ A1	JUB / CEH		2nd May 2024

project number	status	issue
1796	S3	P03

document number
1796-L-120
Project Code - Originator - Zone - Level - Type - Role - Drawing Number

File: S:\1700\1796\LANDS\DETAILED DESIGN\1796-L-120-P03-PUMPING STATION.vwx