Plant Schedule

Trees

Number	Abbreviation	Species	Height	Girth	Specification
10	AlRH	Amelanchier lamarckii 'Robin Hill'	250-300cm	12-14cm	Heavy Standard ,Clear Stem min. 200 ,RB
6	Bn	Betula nigra	350-425cm	14-16cm	Heavy Standard ,Clear Stem min. 200 ,RB
13	Bpu	Betula pubescens	350-425cm	14-16cm	Heavy Standard ,Clear Stem min. 200 ,RB
20	Cbe	Carpinus betulus	400-450cm	16-18cm	Extra Heavy Standard ,Clear Stem min. 200 ,RB
3	CbL	Carpinus betulus 'Lucas'	350-425cm	14-16cm	Heavy Standard ,Clear Stem min. 200 ,RB
19	Ccol	Corylus colurna	350-425cm	14-16cm	Heavy Standard ,Clear Stem min. 200 ,RB
1	Ls	Liquidambar styraciflua	350-425cm	16-18cm	Extra Heavy Standard ,Clear Stem min. 200 ,RB
7	PP	Prunus 'Pandora'	350-425cm	14-16cm	Heavy Standard ,Clear Stem min. 200 ,RB
2	Pav	Prunus avium	400-450cm	16-18cm	Extra Heavy Standard ,Clear Stem min. 200 ,RB
3	Pv	Prunus vedoensis	400-450cm	16-18cm	Extra Heavy Standard ,Clear Stem min. 200 ,RB
2	PCc	Pyrus calleryana 'Chanticleer'	400-450cm	16-18cm	Extra Heavy Standard ,Clear Stem min. 200 ,RB
10	SaLu	Sorbus aria 'Lutescens'	350-425cm	12-14cm	Heavy Standard ,Clear Stem min. 200 ,RB
10	Sau	Sorbus aucuparia	350-425cm	14-16cm	Heavy Standard ,Clear Stem min. 200 ,RB
9	SaCR	Sorbus aucuparia 'Cardinal Royal'	350-425cm	12-14cm	Heavy Standard ,Clear Stem min. 200

Total :118

Shrubs

Number	Abbreviation	Species	Specification	Height	Pot Size	Density
209	CWD	Choisya 'White Dazzler'	Bushy ,C	30-40cm	3L	3/m²
308	Cp	Cistus purpureus	Bushy ,C	30-40cm	3L	3/m²
51	CaMF	Cornus sanguinea 'Midwinter Fire'	Bushy ,C	30-40cm	3L	3/m²
85	EfEG	Euonymus fortunei 'Emerald Gaiety'	Bushy ,C	30-40cm	3L	3/m²
231	FMP	Fuchsia 'Mrs Popple'	Bushy ,C	30-40cm	3L	3/m²
320	HGG	Hebe 'Green Globe'	Bushy ,C	30-40cm	3L	4/m²
193	HSQ	Hebe 'Silver Queen'	Bushy ,C	30-40cm	3L	4/m²
308	HsB	Hydrangea serrata 'Blueband'	Bushy ,C	30-40cm	3L	3/m²
491	LaH	Lavandula angustifolia 'Hidcote'	Bushy ,C	30-40cm	3L	4/m²
49	PtGB	Pittosporum tenuifolium 'Golf Ball'	Bushy ,C	20-30cm	3L	4/m²
448	PlOL	Prunus laurocerasus 'Otto Luyken'	Bushy ,C	30-40cm	3L	3/m²
288	Shh	Sarcococca hookeriana humilis	Bushy ,C	30-40cm	3L	3/m²
271	ScKG	Skimmia confusa 'Kew Green'	Bushy ,C	30-40cm	3L	3/m²
222	Vd	Viburnum davidii	Bushy ,C	30-40cm	3L	3/m²
42	VtEP	Viburnum tinus 'Eve Price'	Bushy ,C	30-40cm	3L	3/m²

Total :3588

Herbaceous

Number	Abbreviation	Species	Specification	Pot Size	Density
274	AhHJ	Anemone x hybrida 'Honorine Jobert'	Full Pot	3L	4/m²
323	BSt	Bergenia 'Silberlicht'	Full Pot	3L	4/m²
270	BcP	Bergenia cordifolia 'Purpurea'	Full Pot	3L	4/m²
246	GAF	Geranium 'Ann Folkard'	Full Pot	3L	4/m²
75	GeWP	Geranium endressii 'Wargrave Pink'	Full Pot	3L	4/m²
238	GR	Geranium Rozanne	Full Pot	3L	4/m²
329	HsS	Heuchera sanguinea 'Splendens'	Full Pot	3L	4/m²
220	NSHG	Nepeta 'Six Hills Giant'	Full Pot	3L	4/m²
207	BAJ	Bedum 'Autumn Joy'	Full Pot	3L	4/m²

Total :2182

Climbers

Number	Abbreviation	Species	Specification	Height	Pot Size	Density
27	Hp	Hydrangea petiolaris	Several Shoots ,3/5 brks ,Caned	80-100cm	3L	Counted
14	LjH	Lonicera japonica 'Halliana'	Several Shoots ,3/5 brks ,Caned	80-100cm	3L	Counted
15	PtVe	Parthenocissus tricuspidata 'Veitchii'	Several Shoots ,3/5 brks ,Caned	80-100cm	3L	Counted

Total :56

Grasses

Number	Abbreviation	Species	Specification	Pot Size	Density
359	Ai	Anemanthele lessoniana	Full Pot	3L	4/m²
278	CID	Carex 'Ice Dance'	Full Pot	3L	4/m²
189	Cd	Carex divulsa	Full Pot	3L	4/m²
258	CoE	Carex oshimensis 'Everoro'	Full Pot	3L	4/m²
249	DcG	Deschampsia cespitosa 'Goldtau'	Full Pot	3L	4/m²
182	Ste	Stipa tenuissima	Full Pot	3L	4/m²

Total :1480

Single species hedgerow planting

Number of Plants	Abbreviation	Species	Specification	Height	Pot Size	Density
1137	El	Escallonia 'Iveyi'	Bushy ,C	60-80cm	3L	0.45/Ctr Double Staggered at 0.45m offset
952	Gii	Griselinia littoralis	Bushy ,C	60-80cm	3L	0.45/Ctr Double Staggered at 0.45m offset
20	Tb	Taxus baccata	Bushy	60-80cm	3L	0.45/Ctr Double Staggered at 0.45m offset

Total :2109

Native hedgerow mix 01

Number	Abbreviation	Species	Height	Specification	Density	Percentage Contribution
121	Ac	Acer campestre	60-80cm	Transplant ,Bushy ,BR	0.45/Ctr Double Staggered at 0.45m offset	10%
121	Csa	Cornus sanguinea	60-80cm	Bushy ,BR	0.45/Ctr Double Staggered at 0.45m offset	10%
121	Cav	Corylus avellana	60-80cm	Bushy ,BR	0.45/Ctr Double Staggered at 0.45m offset	10%
708	C mon	Crataegus monogyna	60-80cm	Transplant ,Bushy ,BR	0.45/Ctr Double Staggered at 0.45m offset	60%
121	Eeu	Euonymus europaeus	60-80cm	Transplant ,Bushy ,BR	0.45/Ctr Double Staggered at 0.45m offset	10%

Total :1192

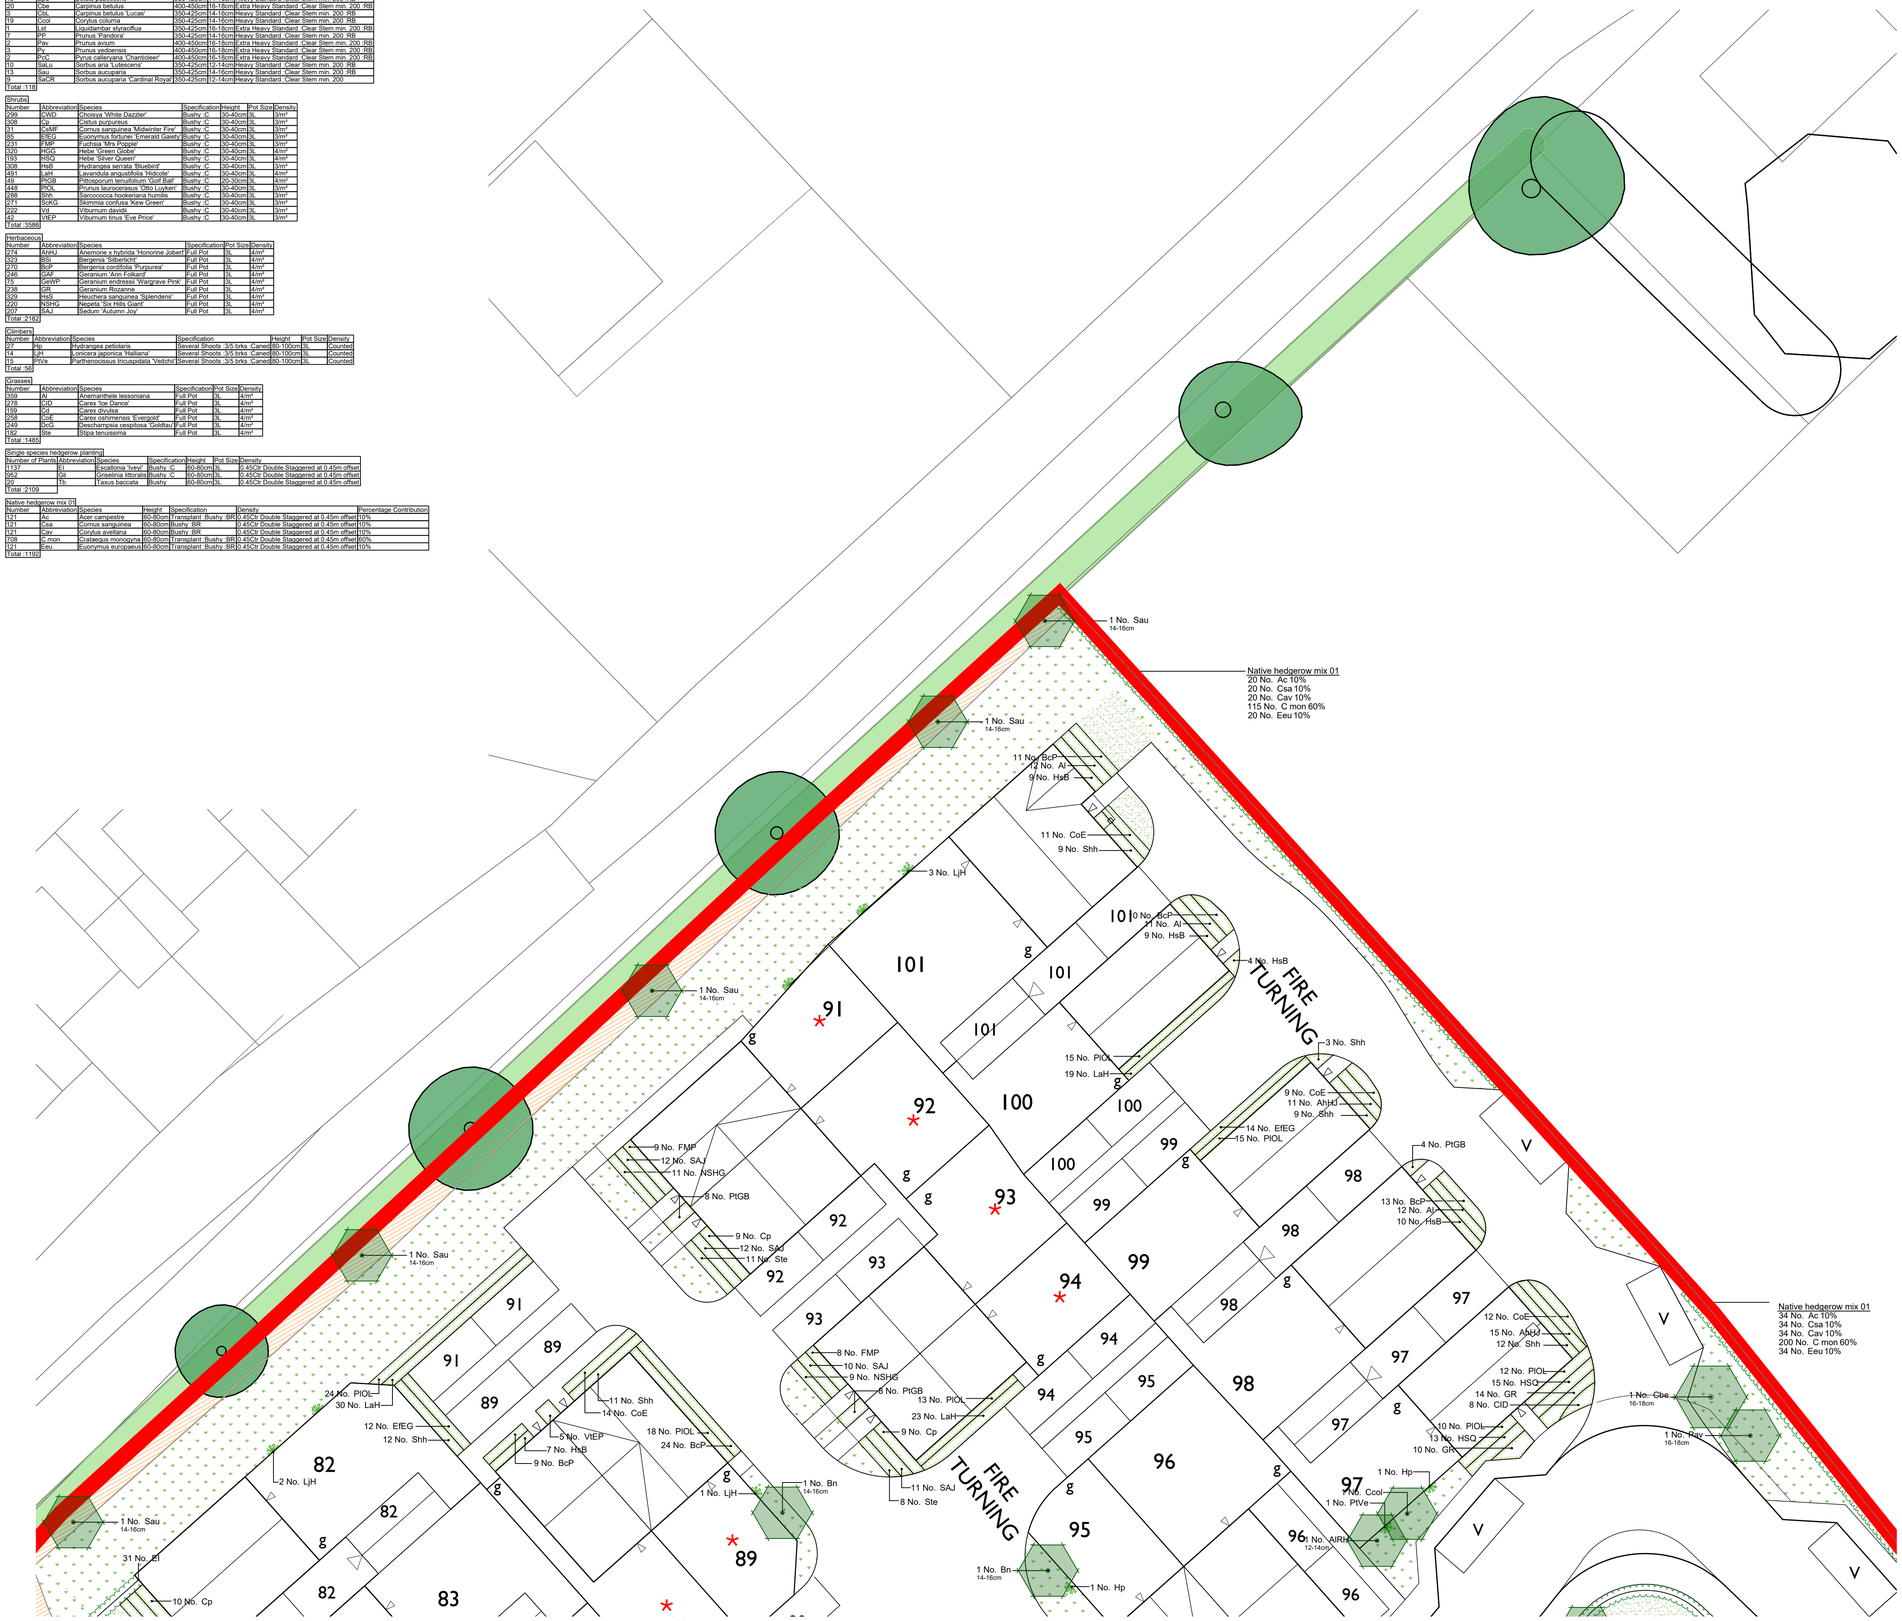

LEGEND

Site boundary

Existing tree to be retained and protected.
Refer to arboricultural information for further detail

Existing vegetation and/or hedgerow to be retained and protected.
Refer to arboricultural information for further detail

Existing grassland to be retained and protected. Where disturbed to be seeded in line with proposed grassland seed mix as specified.

Proposed soft landscaping

Tree planting, refer to detail CB_L_86_263_R8-R9_1700 and 1701

Ornamental hedge - Double staggered
1.2m high in front gardens and 1.8m high elsewhere

Double staggered mixed native hedgerow
To be planted in groups of 7-9no. of each species

Ornamental shrub planting single species bed

Climber

Good quality hardwearing lawn

Mown species rich grassland
Verges laid with species rich turf from Wildflower Turf or similar, remaining areas seeded with ELI Flowering Lawn Mixture from Emorsgate or similar seeded at 4g/m2

Wildflower meadow mix for hedgerow edge
EH1 Hedgerow Mixture from Emorsgate or similar seeded at 4g/m2

NOTES:
1. For Planting Schedule refer to drawing CB_L_86_263_R8-R9_1500

To be read in conjunction with:
- Landscape specification CB_L_86_263_R8-R9_1801
- Landscape management plan CB_L_86_263_R8-R9_1802

LOCATION PLAN

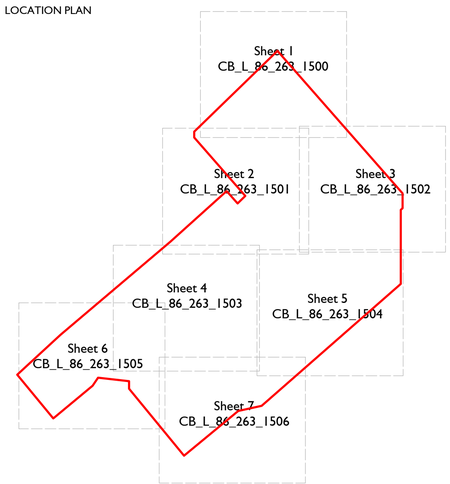

Scale @ A1:
0 1 2 3 4 5 6 7 8 9 10m
Scale 1:200
NORTH

Rev	Date	Drawn	Checked
E	29.10.24	LM	AE
Landscape updated in line with revised layout & comments			
D	06.08.24	SK	AE
Landscape updated in line with comments			

Date: 07.09.22

Drawn by : LM Checked by : AE

Drg No: CB_L_86_263_R8-R9_1500 Rev: E

Project: Woodlands Parcels R8 & R9
Land North of A420, Swindon

Title: Planting Plan
Sheet 1

Client: Taylor Wimpey

GREENLANDSCAPE STUDIO

Green Landscape Studio Limited - The Lakeside Centre, Lakeside Country Park, Wide Lane, Eastleigh, Hampshire - Telephone 01276 450039 - www.gl-studio.co.uk
This drawing and the works depicted are the copyright of Green Landscape Studio Ltd. and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.