BROOKBANKS

1335 Swindon NEV

Technical Note No.56 Rv0: Condition 60 Potable Water
29th August 2023

1 Summary

1.1 Brookbanks Consulting (BCL) is appointed by the Swindon Eastern Villages Consortium to provide technical support for a residential-led scheme development at South Marston and Rowborough to the east of Swindon, together with areas of mixed-use comprising community; employment; education; local retail uses; and formal and informal open space provision on land east of Swindon and north of A420.

1.2 This note is prepared to discharge Condition 60 of the planning permission ref **S/OUT/13/1555/EDSN.** Condition 60 states:

> *Prior to the commencement of the dwellings, commercial and community uses hereby approved, impact studies of the existing water supply infrastructure shall be submitted to and approved in writing by the Local Planning Authority. The studies should determine the magnitude of any new additional capacity required in the system and a suitable connection point. Once agreed all works shall be implemented in accordance with the approved scheme and retained in the approved form.*

1.3 Thames Water have provided confirmation of sufficient capacity in the attached letter dated 18th August 2023. The connection points referenced in the letter are illustrated on the attached plan ref 1335-SK-140 prepared by Brookbanks.

1.4 The consortium will continue to liaise with Thames Water to agree construction details and timing for both supply and connection points.

1.5 We believe that the condition can be discharged, and works can be implemented as agreed.

2 Limitations

2.1 The conclusions and recommendations contained herein are limited to those given the general availability of background information and the planned usage of the site.

2.2 Third party information has been used in the preparation of this report, which Brookbanks Consulting Ltd, by necessity assumes is correct at the time of writing. While all reasonable checks have been made on data sources and the accuracy of data, Brookbanks Consulting Ltd accepts no liability for same.

2.3 The benefits of this report are provided solely to the members of the Swindon Eastern Villages Consortium for the proposed development only.

2.4 Brookbanks Consulting Ltd excludes third party rights for the information contained in the report.

Appendices

-Thames Water letter dated 18th August 2023

-Brookbanks drawing ref 1335-SK-140

Adam Melia
Brookbanks
Sent via email

Water pre-planning

Our ref DS6107419

18 August 2023

Pre-planning enquiry: Confirmation of sufficient capacity

Dear Adam,

This letter is in response to your clean water Pre-Planning enquiry for a new proposed development part of the Swindon New Eastern Villages – South Marston & Rowborough development village located north of the A420, SN3 4ST.

We have completed the assessment based on the information submitted in your application with the purpose of assessing capacity within the existing Thames Water clean water network.

This development has been identified to be part of the New Eastern Villages (NEV) totalling approx. 8,000 dwellings.

We have based our response on the information provided below:

Existing Development: Greenfield Site.

Proposed Development: 2,380 dwellings, two schools, retail and employment area.

The proposed supply strategy has been outlined below:

130 dwellings to be supplied from the 4" inch water main on Old Vicarage Road.

The remainder 2,250 dwellings, two schools, retail and employment areas to be supplied from the 560mm HPPE Axford main located off the White Hart roundabout.

The proposed building programme has been included below:

	2024	2025	2025	2026	2027	2028	2029	2030
	150	150	150	150	150	150	150	150
Cumulative	**150**	**300**	**450**	**600**	**750**	**900**	**1050**	**1200**

	2031	2032	2033	2034	2035	2036	2037	2038
	150	150	150	150	150	150	150	130
Cumulative	**1350**	**1500**	**1650**	**1800**	**1950**	**2100**	**2250**	**2380**

Based on the development information provided and the request for a single potable water supply to serve the wider development, in line with OFWAT's Charging Rules for New Connection Services, the most practicable point of supply for the 2,250 dwellings is the 560mm Axford Trunk Main off the White Hart roundabout.

Thames Water are currently undertaking an assessment to review the need for network reinforcement to be completed to provide adequate supply to the wider NEV.

If you've any further questions, please contact me on 07747 640 273.

Yours sincerely

David Stamateris

Senior Project Engineer

Thames Water

Original Drawing Size A1

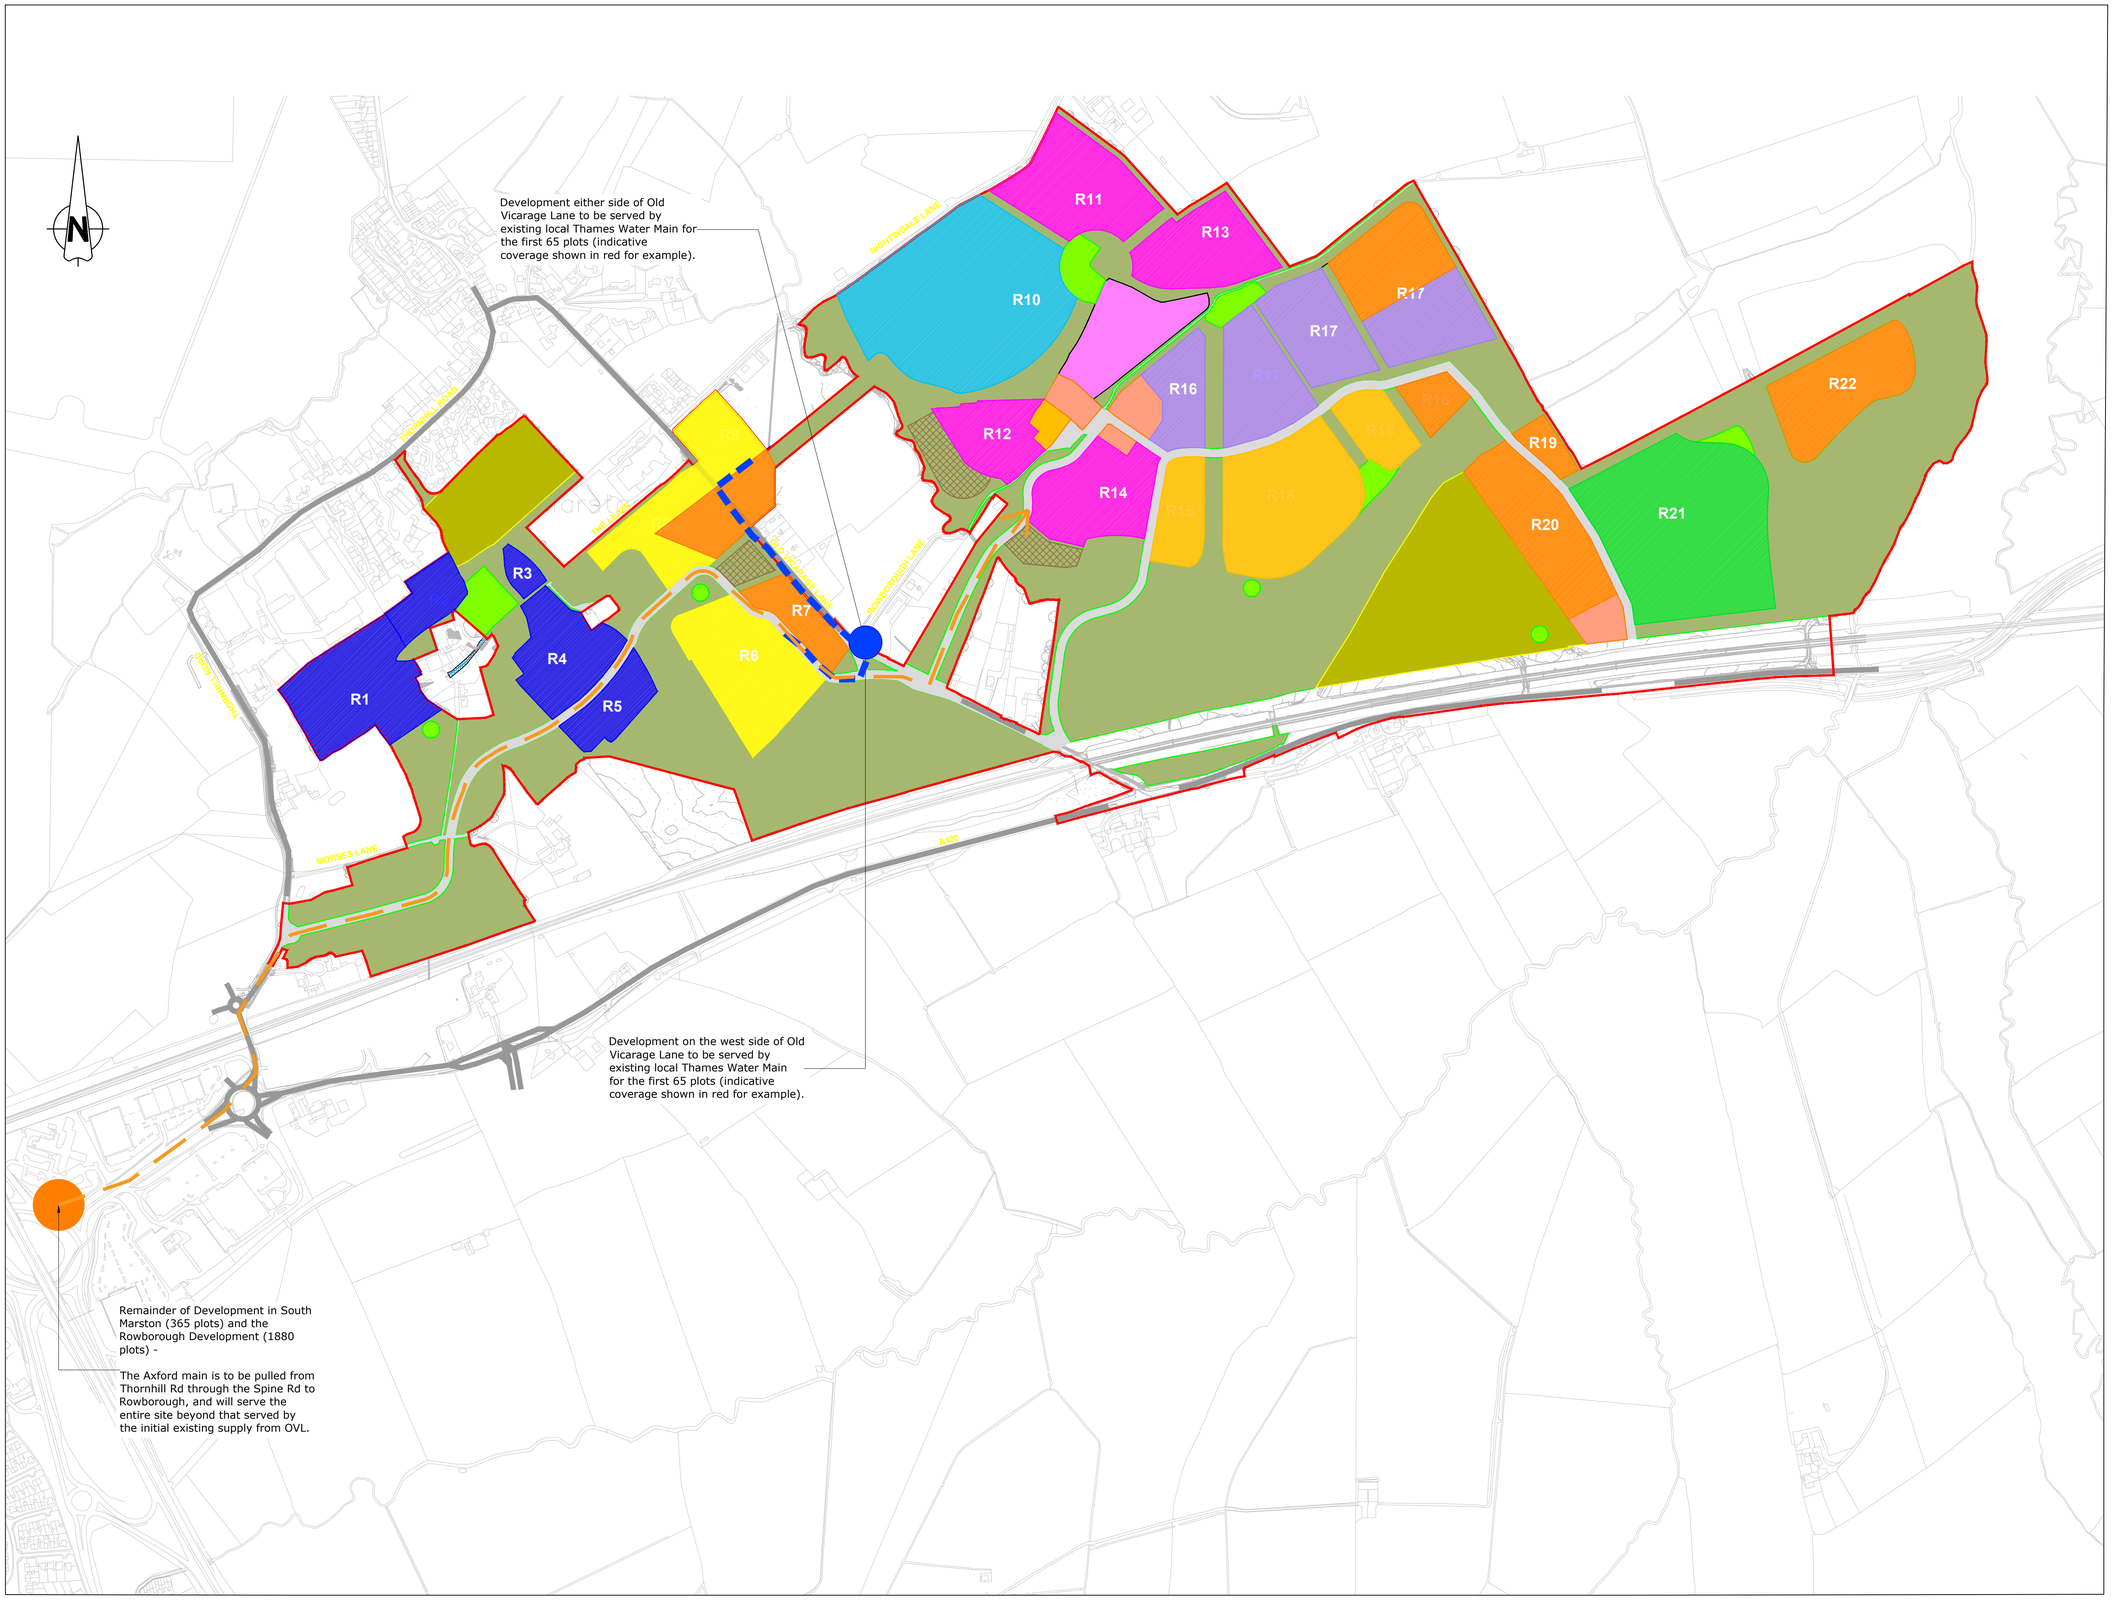

Construction Design and Management (CDM)
Key Residual Risks

Contractors entering the site should gain permission from the relevant land owners and/or principle contractor working on site at the time of entry. Contractors shall be responsible for carrying out their own risk assessments and for liaising with the relevant services companies and authorities. Listed below are Site Specific key risks associated with the project.

1) Overhead and underground services
2) Street Lighting Cables
3) Working adjacent to water courses and flood plain
4) Soft ground conditions
5) Working adjacent to live highways and railway line
6) Unchartered services
7) Existing buildings with potential asbestos hazards

NOTES:

1. Do not scale from this drawing.
2. All dimensions are in metres unless otherwise stated.
3. Brookbanks consulting ltd has prepared this drawing for the sole use of the client. the drawing may not be relied upon by any other party without the express agreement of the client and Brookbanks consulting ltd. where any data supplied by the client or from other sources has been used, it has been assumed that the information is correct. no responsibility can be accepted by Brookbanks consulting ltd for inaccuracies in the data supplied by any other party. the drawing has been produced based on the assumption that all relevant information has been supplied by those bodies from whom it was requested.
4. No part of this drawing may be copied or duplicated without the express permission of Brookbanks consulting ltd.
5. All dimensions and all levels in metres unless noted otherwise.

A	Parcel text annotations removed	CM	CM	SM	07.09.23
-	First Issue	MA	CM	SM	18.05.23

BROOKBANKS

6150 Knights Court, Solihull Parkway, Birmingham, B37 7WY
T +44 (0)203 958 5400 E mail@brookbanks.com
W brookbanks.com

Swindon EDA Consortium

Proposed Development
Swindon EV

Thames Water Potable Plan

Status		Status Date
Information		May 2023
Drawn	Checked	Date
MA	CM	18.05.23
Scale	Number	Rev
1:5000	1335-SK-140	A

0 100 200 300 400 500
METRES

UNTIL TECHNICAL APPROVAL HAS BEEN OBTAINED FROM THE RELEVANT LOCAL AUTHORITIES, IT SHOULD BE UNDERSTOOD THAT ALL DRAWINGS ARE ISSUED AS PRELIMINARY AND NOT FOR CONSTRUCTION. SHOULD THE CONTRACTOR COMMENCE SITE WORK PRIOR TO APPROVAL BEING GIVEN, IT IS ENTIRELY AT HIS OWN RISK.

© Brookbanks Consulting Limited 2023
P:\1335\CAD\BCL\Current Drawings\1335-SK-140A - Thames Water Potable Plan.dwg